

## 35615 AL-MS-WW-MPR-W-PT

Linear LED luminaire

5905339356154



### PRODUCT PARAMETERS:

**Colour:** white

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**Fixture lighting direction:** down

**Length [mm]:** 1150

**Width [mm]:** 83

**Height [mm]:** 65

**Integrated LED light source:** yes

**Explanation of markings and signs used:** (PT) - do wbudowania w sufit

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 18

**Class of protection against electric shock:** I

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 2150

**Service life [h]:** 50000

**Luminous-flux-retention factor at the end of rated service life:** L90B10

**Number of on/off cycles:**  $\geq 30000$

**Lighting angle [°]:** X75/Y90

**Ambient temperature range to which the product can be exposed:** 5÷25

**Shade type:** microprismatic

**Enclosure material:** steel

**Connection type:** Self-clamping block

**Range of sections of wires used [mm²]:** 1,5÷2,5

**Lamp-heating time [s]:**  $\leq 1$

**Lamp-ignition time [s]:**  $\leq 0,5$

**IP class:** 20


**Luminous efficiency of the lamp [lm/W]:** 119

### PARAMETERS FOR LED AND OLED LIGHT SOURCES:

**Correlated colour temperature [K]:** 3000


**Colour consistency in McAdam ellipses:**  $\leq 3$

**Colour rendering index:** 80

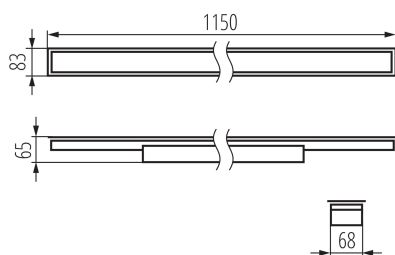

## 35615 AL-MS-WW-MPR-W-PT

### Linear LED luminaire

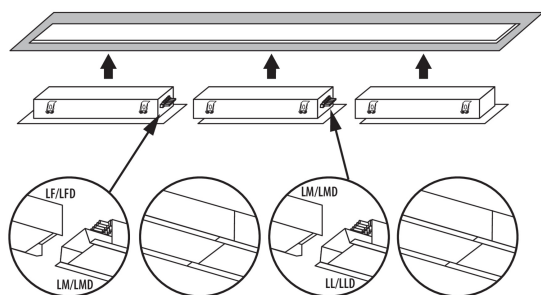

#### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 1

**Number of units in the secondary packaging :** 1

**Number of units in the packaging :** 1

#### ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35615) AL-MS-WW-MPR-W-PT / Krzywa rozsyłu światła  
(biegunowo)

Oprawa: KANLUX S.A. (kat 35615) AL-MS-WW-MPR-W-PT  
Lampy: 1 x AL-MS-WW-MPR

