


35651 BTL 18W-930-B

Track light projector

5905339356512



Kanlux BTL LED is a new design of luminaires adapted to the Kanlux TEAR system and to the majority of 3-circuit rail systems. Luminaires are equipped with a power supply integrated with the adapter. Kanlux BTL are luminaires in the directional version with a lens and lighting angle adjustment in the range from 15° to 45°. Optionally, a diffuser with a honeycomb structure that reduces glare can be used. In Kanlux BTL we can choose the power (18W 28W 38W), the color of the housing (white or black) and the color of light (warm or neutral). The Kanlux BTL series of luminaires has a high color rendering index Ra 90+, and their high quality is confirmed by a 5-year warranty.

PRODUCT PARAMETERS:

Colour: black

Place of assembly: na szynę TEAR

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 18

Class of protection against electric shock: II

Diode type: LED COB

Luminous flux [lm]: 1750

Colour temperature: Warm white

Service life [h]: 50000

Number of on/off cycles: ≥30000

Lighting angle [°]: 15-45

Ambient temperature range to which the product can be exposed: 5+25

Enclosure material: aluminum alloy

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

The fixture is movable horizontally [°]: 340

The fixture is movable vertically [°]: 90

IP class: 20

Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:


Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤6

Colour rendering index: 90

Volume of a cardboard box [m³]: 0.051975

Luminaire: KANLUX S.A. (kat 35651) BTL 18W-930-B 45deg
Lamps: 1 x BTL 18W-930

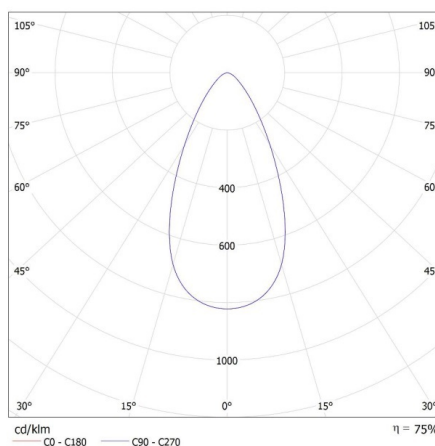

35651 BTL 18W-930-B

Track light projector

