Kanlux ul. Objazdowa 1-3, 41-922 Radzionków, Poland

35658 BTL 38W-930-W


Track light projector

5905339356581









Kanlux BTL LED is a new design of luminaires adapted to the Kanlux TEAR system and to the majority of 3-circuit rail systems. Luminaires are equipped with a power supply integrated with the adapter. Kanlux BTL are luminaires in the directional version with a lens and lighting angle adjustment in the range from 15⁰ to 45⁰. Optionally, a diffuser with a honeycomb structure that reduces glare can be used. In Kanlux BTL we can choose the power (18W 28W 38W), the color of the housing (white or black) and the color of light (warm or neutral). The Kanlux BTL series of luminaires has a high color rendering index Ra 90+, and their high quality is confirmed by a 5-year warranty.

PRODUCT PARAMETERS:

Colour: white
Place of assembly: na szynę TEAR
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Integrated LED light source: yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 38
Class of protection against electric shock: II
Diode type: LED COB
Luminous flux [lm]: 4000
Colour temperature: Warm white
Service life [h]: 50000
Number of on/off cycles: ≥30000
Lighting angle [°]: 15-45
Ambient temperature range to which the product can be exposed: 5+25
Enclosure material: aluminum alloy
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
The fixture is movable horizontally [°]: 340
The fixture is movable vertically [°]: 90
IP class: 20
Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 90

Date of issue: 18.10.2023, 11:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

Kanlux ul. Objazdowa 1-3, 41-922 Radzionków, Poland

35658 BTL 38W-930-W

Track light projector





LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 12
Number of units in the secondary packaging: 1
Number of units in the packaging: 12
Net unit weight [g]: 788
Grammage [g]: 933.33
Length of a unit pack [cm]: 14
Width of a unit pack [cm]: 13
Height of a unit pack [cm]: 17.5
Weight of a cardboard box [kg]: 11.19996
Width of a cardboard box [cm]: 30
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm] : 55
Volume of a cardboard box [m³]: 0.04785

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

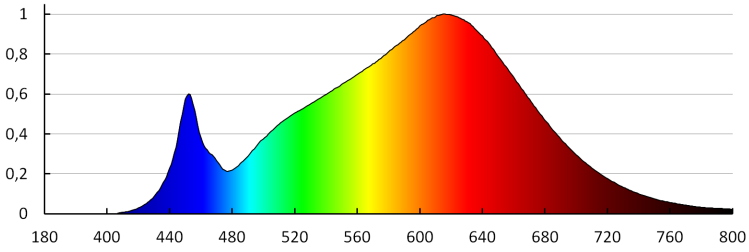

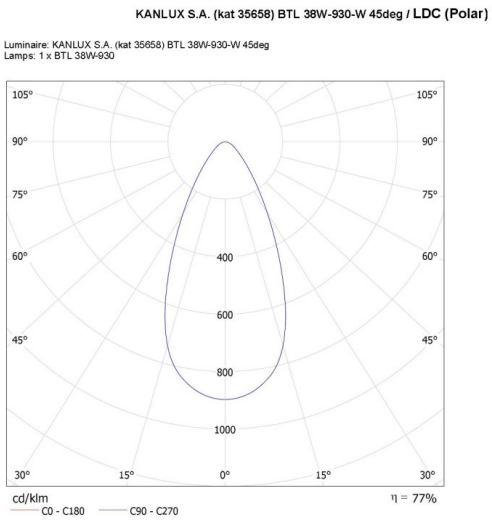

Date of issue: 18.10.2023, 11:17


We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

35658 BTL 38W-930-W

Track light projector

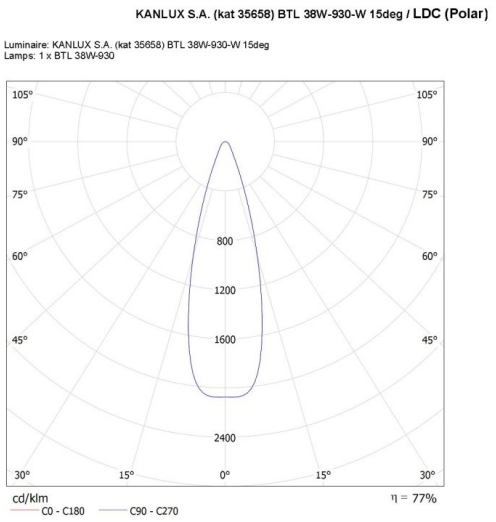

Date of issue: 18.10.2023, 11:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN