


## 35673 TIBERI PRO 30W-940-B

Downlight fitting

5905339356734

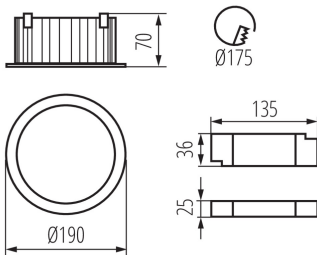

Kanlux TIBERI PRO are flush-mounted luminaires, which means they are perfectly compatible with suspended ceilings. They perfectly illuminate passageways, sanitary facilities or office and retail areas. The advantages of these downlights include: 50,000 hours of service life, excellent reproduction of natural colours (CRI>90), luminous efficacy of up to 105lm/W and a 5-year warranty. The increased protection rating (IP44/20) of Kanlux TIBERI PRO luminaires protects them from dust, particles and moisture.

### PRODUCT PARAMETERS:

**Colour:** black

**Place of assembly:** Recessed mount in the ceiling

**Place of application:** Indoors

**Minimum distance from the illuminated object:** 0,5m

**Compatible with a dimmer:** no

**The product is not suitable to be covered with a heat-insulating material:** yes

**Height [mm]:** 70

**Diameter [mm]:** 190

**Assembly hole [mm]:** 175

**Integrated LED light source:** yes

**Rated voltage [V]:** 220-240 AC

**Rated frequency [Hz]:** 50

**Maximum power [W]:** 30

**Class of protection against electric shock:** II

**Lampshade material:** plastic

**Diode type:** LED SMD

**Luminous flux [lm]:** 2850

**Colour temperature:** white

**Service life [h]:** 50000

**Number of on/off cycles:** ≥30000

**Lighting angle [°]:** 90

**Ambient temperature range to which the product can be exposed:** 5÷25

**Enclosure material:** aluminum alloy

**Connection type:** Terminal block

**Lamp-heating time [s]:** ≤1

**Lamp-ignition time [s]:** ≤0,5


**IP class:** 44/20

**35673 TIBERI PRO 30W-940-B**

Downlight fitting

**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:**  $\leq 6$ **Colour rendering index:** 90**LOGISTIC DATA:****Packaging method:** 18**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 18**Net unit weight [g]:** 722**Grammage [g]:** 880.56**Length of a unit pack [cm]:** 20**Width of a unit pack [cm]:** 19.5**Height of a unit pack [cm]:** 8.5**Weight of a cardboard box [kg]:** 15.85008**Width of a cardboard box [cm]:** 41**Height of a cardboard box [cm]:** 27**Length of a cardboard box [cm]:** 61.5**Volume of a cardboard box [m<sup>3</sup>]:** 0.068081**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

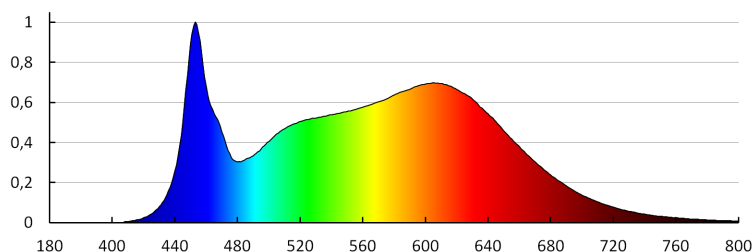

## 35673 TIBERI PRO 30W-940-B

Downlight fitting

KANLUX S.A. (kat 35673) TIBERI PRO 30W-940-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 35673) TIBERI PRO 30W-940-B  
Lamps: 1 x TIBERI PRO 30W-940

