


35675 TIBERI PRO 40W-940-B

Downlight fitting

5905339356758

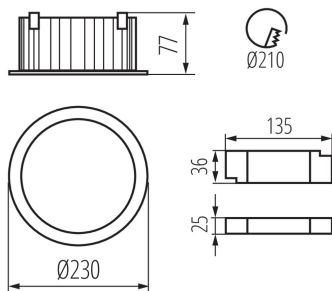

Kanlux TIBERI PRO are flush-mounted luminaires, which means they are perfectly compatible with suspended ceilings. They perfectly illuminate passageways, sanitary facilities or office and retail areas. The advantages of these downlights include: 50,000 hours of service life, excellent reproduction of natural colours (CRI>90), luminous efficacy of up to 105lm/W and a 5-year warranty. The increased protection rating (IP44/20) of Kanlux TIBERI PRO luminaires protects them from dust, particles and moisture.

PRODUCT PARAMETERS:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Height [mm]: 77

Diameter [mm]: 230

Assembly hole [mm]: 210

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 40

Class of protection against electric shock: II

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 3800

Colour temperature: white

Service life [h]: 50000

Number of on/off cycles: ≥30000

Lighting angle [°]: 90

Ambient temperature range to which the product can be exposed: 5÷25

Enclosure material: aluminum alloy

Connection type: Terminal block

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5


IP class: 44/20

35675 TIBERI PRO 40W-940-B

Downlight fitting

PARAMETERS FOR LED AND OLED LIGHT SOURCES:**Correlated colour temperature [K]:** 4000**Colour consistency in McAdam ellipses:** ≤ 6 **Colour rendering index:** 90**LOGISTIC DATA:****Packaging method:** 12**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 12**Net unit weight [g]:** 1020**Grammage [g]:** 1232.5**Length of a unit pack [cm]:** 23.5**Width of a unit pack [cm]:** 9**Height of a unit pack [cm]:** 24.5**Weight of a cardboard box [kg]:** 14.79**Width of a cardboard box [cm]:** 49.5**Height of a cardboard box [cm]:** 27.5**Length of a cardboard box [cm]:** 57**Volume of a cardboard box [m³]:** 0.077591**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

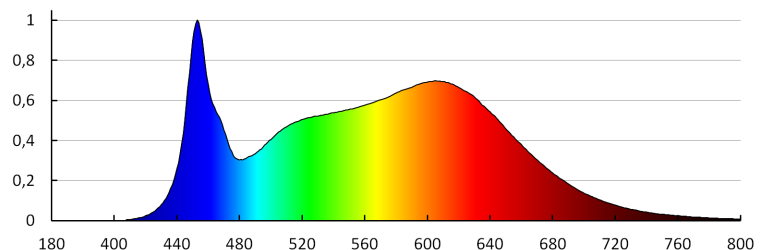

35675 TIBERI PRO 40W-940-B

Downlight fitting

KANLUX S.A. (kat 35675) TIBERI PRO 40W-940-B / LDC (Polar)

Luminaire: KANLUX S.A. (kat 35675) TIBERI PRO 40W-940-B
Lamps: 1 x TIBERI PRO 40W-940

