


35847 OS-L8D-WW-RST-W-N3

Surface-mounted LED office fixture

5905339358479

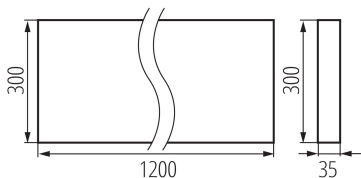

PRODUCT PARAMETERS:

- Colour:** white
Place of assembly: ceiling mounted
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Length [mm]: 1200
Width [mm]: 300
Height [mm]: 35
Integrated LED light source: yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 31W
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 4300
Colour temperature: Warm white
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥ 30000
Lighting angle [°]: 80
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: louvre
Enclosure material: Metal
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
Rodzaj soczewki [°]: 80
IP class: 20
Additional information: The LED light source can only be replaced by qualified personnel (Kanlux service only)
Additional information: Any control panel or control equipment can only be replaced by qualified personnel (Kanlux service only)
Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000

Date of issue: 10.07.2024, 13:08

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

35847 OS-L8D-WW-RST-W-N3

Surface-mounted LED office fixture



Colour consistency in McAdam ellipses : ≤ 3

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging : 1

Number of units in the packaging: 1

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35847) OS-L8D-WW-RST-W-N3 / Krzywa rozsytu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35847) OS-L8D-WW-RST-W-N3
Lampy: 4 x OS-L8D-WW-RST

