


35940 OS-S5D-WW-RST-B-P1

Recessed - Mounted LED Office Fixture

5905339359407



OS RST B P1

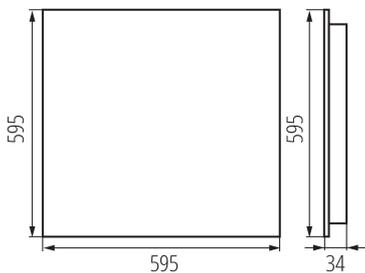

PRODUCT PARAMETERS:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 34

Integrated LED light source : yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 22W

Class of protection against electric shock : I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 2800

Colour temperature: Warm white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life : L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 50

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: louvre

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

Lamp-heating time [s]: ≤ 1

Lamp-ignition time [s]: $\leq 0,5$

Rodzaj soczewki [°]: 50

IP class: 20

UGR: ≤ 14

Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:


Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses : ≤ 3

Colour rendering index: 80

35940 OS-S5D-WW-RST-B-P1

Recessed - Mounted LED Office Fixture

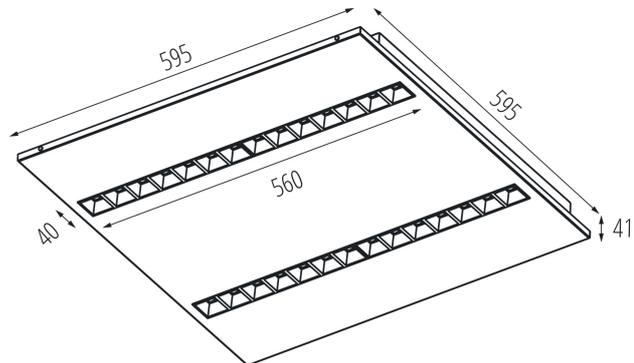

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

KANLUX S.A. (kat 35940) OS-S5D-WW-RST-B-P1 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 35940) OS-S5D-WW-RST-B-P1
Lampy: 4 x OS-S5D-WW-RST

