

36435 PARCOLI 30-50W CCT G

Park luminaire

5905339364357



up to

160 lm
W



Paracoli are outdoor, modernist and energy- efficient fixtures designed to illuminate parks and alleys. The fixtures offer power adjustments (30W,40W,50W) and colour temperature (3000K, 4000K, 6500K), ensuring optimal lightning conditions. High luminous efficiency in the range of 160 lm/W, weather resistance IP66, the adjustable 60° angle ensures optimal functionality and IK08 durability. Simple, pole-mounted or bracket-mounted installation and ENEC certification confirm the quality and safety of the product, backed by 5-year warranty.

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 30 / 40 / 50

Luminous flux [lm]: max 7250 / 8000 / 7500

Lighting angle [°]: 120

Correlated colour temperature [K]: 3000/4000/6500

Colour consistency in McAdam ellipses : ≤6

Colour temperature: Warm white, white, cold white

Colour rendering index: 70

Service life [h]: 50000

Number of on/off cycles: ≥30000

Colour: grey

Place of assembly: street pole

Place of application: outdoors

Minimum distance from the illuminated object : 1m

Compatible with a dimmer: no

RAL: 9023

Length [mm]: 301

Width [mm]: 301

Height [mm]: 441

Integrated LED light source: yes

Class of protection against electric shock : I

Lampshade material: PC

Enclosure material: aluminum alloy



Ambient temperature range to which the product can be exposed: -20÷40

Connection type: Free cable ends

Range of sections of wires used [mm²]: 0,75÷2,5

36435 PARCOLI 30-50W CCT G

Park luminaire

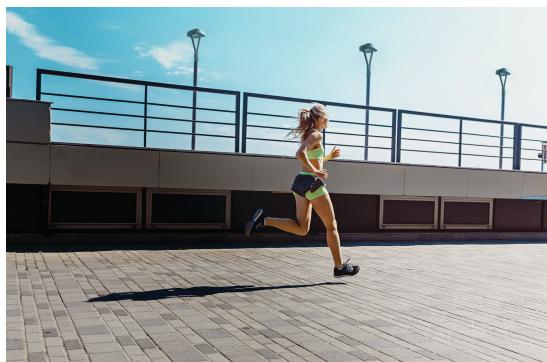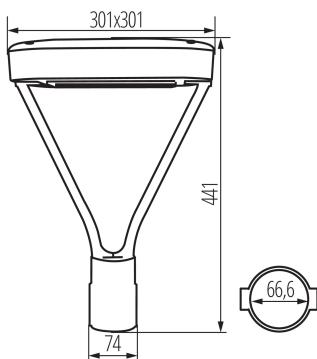

PARCOLI 30-50W CCT G			
	30 W	40 W	50 W
WW	5215lm	6580lm	7250lm
NW	5555lm	7090lm	8000lm
CW	5515lm	6970lm	7500lm

IK class: 08

IP class: 66

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): C

Useful luminous flux of the light source Φ_{use} [lm] : 8055

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Survival factor: 0,9

The lumen maintenance factor: 0,96

Lighting technology used: LED

Non-directional or directional light source : NDLS

Mains or non-mains light source : NMLS

Dimmable: no

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging : 1

Number of units in the packaging : 4

Net unit weight [g] : 2960

Grammage [g] : 3562.5

Gross unit weight [g] : 3348

Length of a unit pack [cm] : 41

Width of a unit pack [cm] : 38.5

Height of a unit pack [cm] : 12

Weight of a cardboard box [kg] : 14.25

Width of a cardboard box [cm] : 40

Height of a cardboard box [cm] : 51

Length of a cardboard box [cm] : 42.5

Volume of a cardboard box [m³] : 0.0867


ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement,

36435 PARCOLI 30-50W CCT G


Park luminaire

available on our website

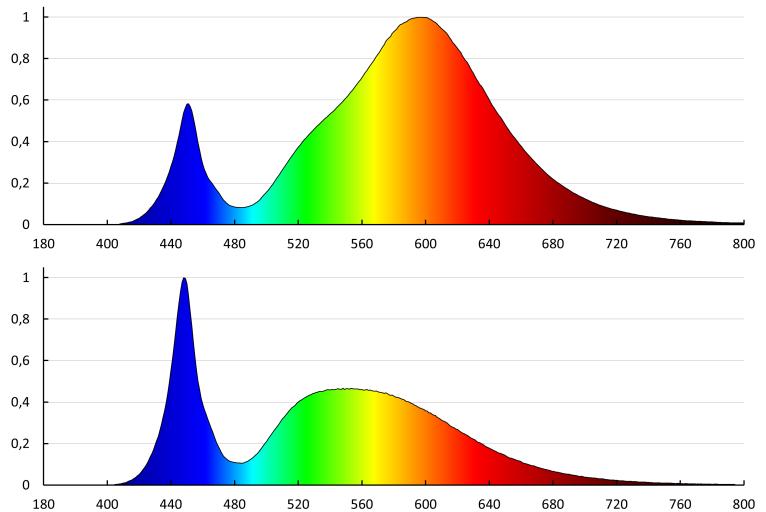

KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_0st / Krzywa rozszeru światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_0st
Lampy: 1 x PARCOLI 50W 3000K

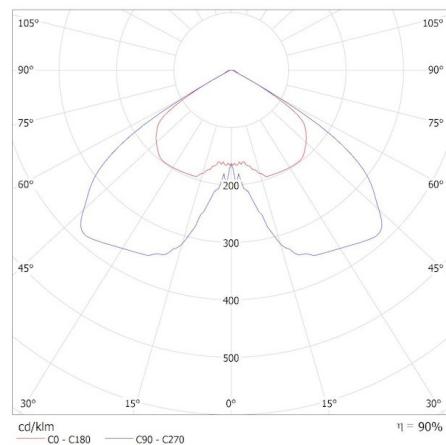

Date of issue: 11.06.2025, 10:20

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


36435 PARCOLI 30-50W CCT G

Park luminaire

KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_15st / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_15st


Lampy: 1 x PARCOLI 50W 3000K

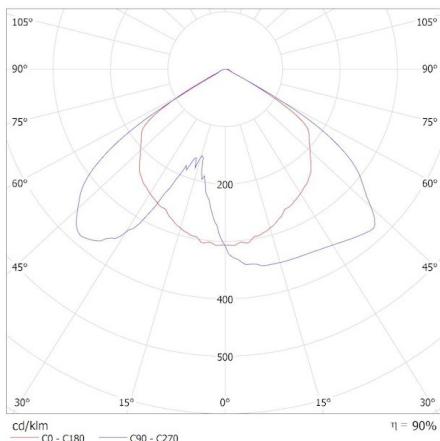

KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_30st / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_30st

Lampy: 1 x PARCOLI 50W 3000K

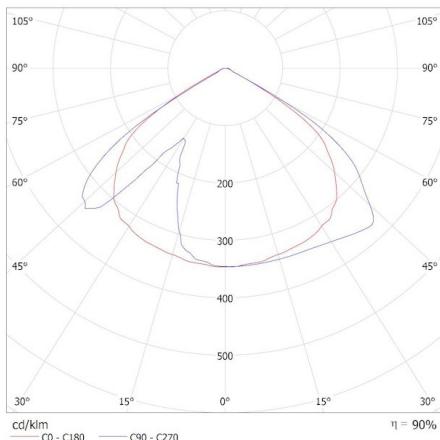

Date of issue: 11.06.2025, 10:20

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


36435 PARCOLI 30-50W CCT G

Park luminaire

KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_45st / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_45st


Lampy: 1 x PARCOLI 50W 3000K

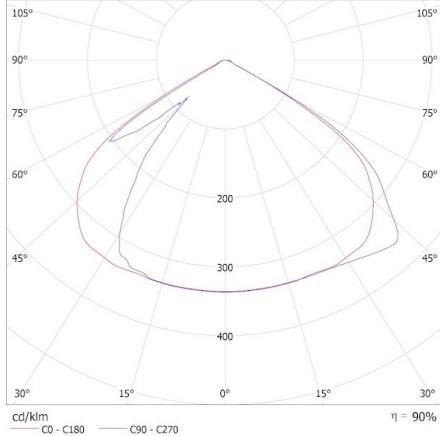

KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_60st / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36435) PARCOLI 30-50W CCT G_60st

Lampy: 1 x PARCOLI 50W 3000K

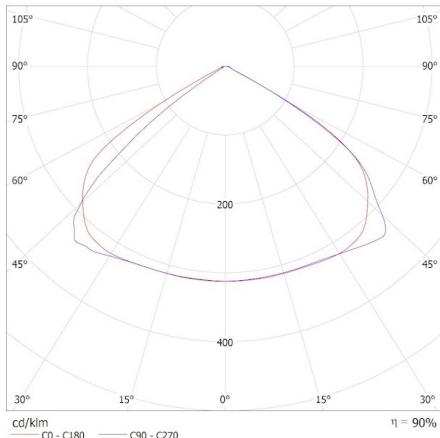

Date of issue: 11.06.2025, 10:20

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com