


36511 TAVO LED DO 9W-NW

Downlight fitting

5905339365118

IP
44/20

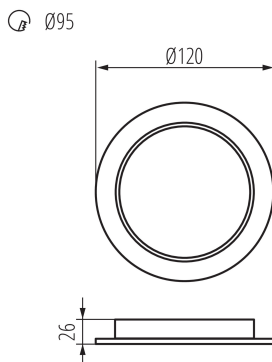

Kanlux TAVO LED is a family of flush-mounted downlights. They are available in two shapes (round and square) and 5 wattages - from 5W to 24W. Kanlux TAVO LED downlights are characterised by a minimalist, Scandinavian design. Additional advantages are their IP44/20 tightness, as well as the possibility of surface mounting the 12W and 18W models in the Kanlux TAVO FRAME.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source : DLS

Mains or non-mains light source : MLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object : 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Height [mm]: 26

Diameter [mm]: 120

Assembly hole [mm]: Ø95

Integrated LED light source : yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 9

Class of protection against electric shock : II

Lampshade material: plastic

Enclosure material: plastic

Diode type: LED SMD

LED module: 262D-30 V1.0

Luminous flux [lm]: 900

Colour temperature: white

36511 TAVO LED DO 9W-NW

Downlight fitting



Service life [h]: 25000

Number of on/off cycles: ≥ 15000

Lighting angle [°]: 120

Ambient temperature range to which the product can be exposed: 5÷25

Connection type: Free cable ends

Wire length [m]: 0.1

IP class: 44/20

Kształt: round

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

Mercury content in the lamp [mg]: 0

Luminous efficiency of the lamp [lm/W]: 100

PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Peak luminous intensity [cd]: 470

Beam angle [°]: 110

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 9

Energy efficiency class of the light source in the contains product (CP): D

Useful luminous flux of the light source Φ_{use} [lm]: 1060

Useful luminous flux of the light source Φ_{use} [lm]: in wide cone (120°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

On-mode power of the light source P_{on} [W]: 9

Height of the light source [mm]: 73

Width of the light source [mm]: 78

Depth of the light source [mm]: 6

Colour rendering index: 80

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

R9 colour rendering index value: 0

Survival factor: 0,9

The lumen maintenance factor: 0,96

36511 TAVO LED DO 9W-NW

Downlight fitting

PARAMETERS FOR LED AND OLED

MAINS LIGHT SOURCES:

Displacement factor ($\cos \phi$): 0,9

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1,0

Stroboscopic effect metric (SVM): 0,4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 100

Number of units in the secondary packaging: 1

Number of units in the packaging: 100

Net unit weight [g]: 78

Grammage [g]: 130.6

Gross unit weight [g]: 124

Length of a unit pack [cm]: 3.7

Width of a unit pack [cm]: 12.3

Height of a unit pack [cm]: 12.3


Weight of a cardboard box [kg]: 13.06

Width of a cardboard box [cm]: 40

Height of a cardboard box [cm]: 27.5


Length of a cardboard box [cm]: 64

Volume of a cardboard box [m³]: 0.0704

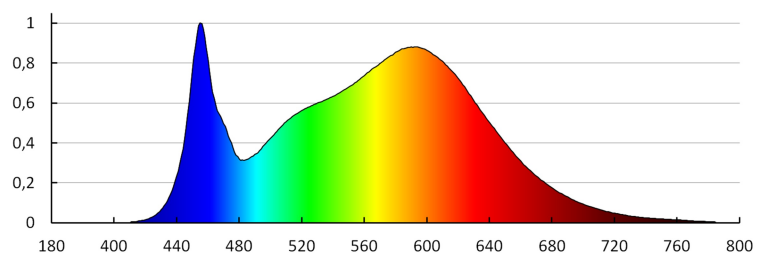

36511 TAVO LED DO 9W-NW

Downlight fitting

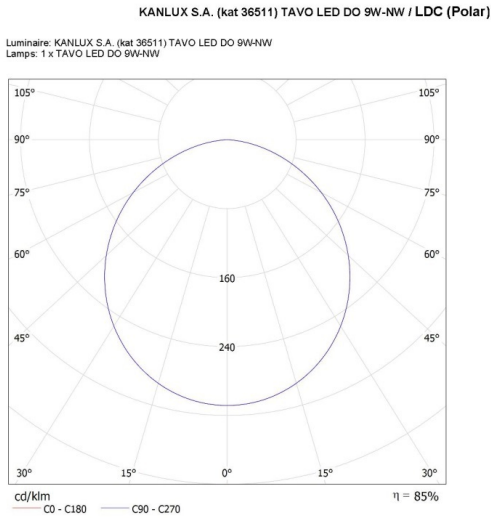

36511 TAVO LED DO 9W-NW

Downlight fitting

ACCESSORIES

36520

TAVO FRAME DO 12W


Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36521

TAVO FRAME DO 18W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36522

TAVO FRAME DL 12W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.



36523

TAVO FRAME DL 18W

Ramka do montażu natynkowego downlightów Kanlux TAVO LED.

