


36607 FL SONE SLR L NW-GR

Solar LED light fitting

5905339366078

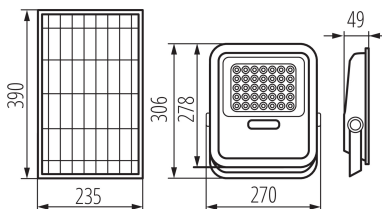

The Kanlux FL SONE SLR fixture is a solar-powered floodlight. We can choose from two floodlight power solutions: 10 or 15W. IP65 makes them dust-proof and protected against water ingress. The adjustable adapter allows for separate installation of the luminaire and solar panel.

PRODUCT PARAMETERS:

Place of assembly: wall mounted

Replaceable light source: no

Batteries included: yes

Length [mm]: 270

Width [mm]: 49

Height [mm]: 306

Battery-power supply: yes

Rated voltage [V]: 3,2 DC

Maximum power [W]: max 15

Class of protection against electric shock: III

Lampshade material: glass

Diode type: LED SMD

Luminous flux [lm]: max 2200

Colour temperature: white

Service life [h]: 25000

Number of on/off cycles: ≥ 20000

Lighting angle [°]: 90

Ambient temperature range to which the product can be exposed: -10+35

Battery (type): LiFePO4

Battery (parameters): 15000mAh

Enclosure material: ABS

IP class: 65

Luminous efficiency of the lamp [lm/W]: max 147

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 2680

36607 FL SONE SLR L NW-GR

Solar LED light fitting



Grammage [g]: 3188

Gross unit weight [g]: 3046

Length of a unit pack [cm]: 43.5

Width of a unit pack [cm]: 29.5

Height of a unit pack [cm]: 43.5

Weight of a cardboard box [kg]: 15.94

Width of a cardboard box [cm]: 29.5

Height of a cardboard box [cm]: 43.5

Length of a cardboard box [cm]: 43.5

Volume of a cardboard box [m³]: 0.055821