

iQ-LED

Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland


36677 IQ-LED A60 7,8W-NW

LED light source

5905339366771



IQ-LED A60 7,8W



Kanlux IQ-LED A60 provides an eye-friendly temperature of colour and reliability, and all this in the classic A60 design. The new iQ-LED bulbs by Kanlux also offer exceptional luminous efficacy, up to 138 Lumens per Watt, and as a result lower energy consumption. IQ-LEDs from Kanlux offer full comfort and safety.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source : NDLS
Mains or non-mains light source : MLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: white
Compatible with a dimmer: no
Width [mm]: 60
Height [mm]: 109
Depth [mm]: 60
Diameter [mm]: 60
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Lamp rated current [mA]: 60
Rated power [W]: 7.8
Total rated luminous flux [lm]: 1055
Rated beam angle [°]: 180
Material: plastic
Lampshade material: plastic
Light source: A60
Diode type: LED SMD
Colour temperature: white
Cap: E27
Rated lamp-service life [h]: 25000
Number of on/off cycles: ≥50000

Date of issue: 02.02.2024, 18:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN


iQ-LED

Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

36677 IQ-LED A60 7,8W-NW

LED light source

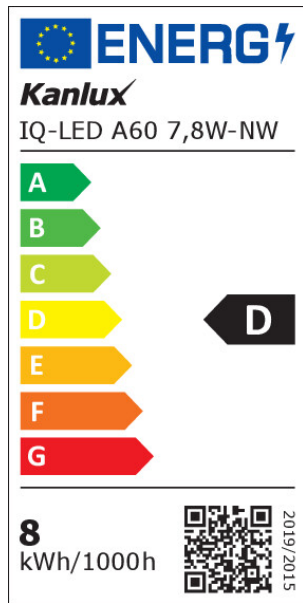

Light source shape: standard

Additional information: Light source (LS)

Mercury content: no

Photobiological safety: RG1

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 8

Energy efficiency class: D

Useful luminous flux of the light source Φ_{use} [lm]: 1055

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

On-mode power of the light source P_{on} [W]: 7.8

Height of the light source [mm]: 109

Width of the light source [mm]: 60

Depth of the light source [mm]: 60

Colour rendering index: 90

Chromaticity coordinates (x): 0.38

Chromaticity coordinates (y): 0.38

Claim of equivalent power [W]: 75

R9 colour rendering index value: 80

Survival factor: 0,9

The lumen maintenance factor: 0,96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor (cos ϕ_1): 0,7

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1,0

Stroboscopic effect metric (SVM): 0,4

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 34

Date of issue: 02.02.2024, 18:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN




Kanlux

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

36677 IQ-LED A60 7,8W-NW


LED light source

Grammage [g]: 63.9
Gross unit weight [g]: 50
Length of a unit pack [cm]: 6
Width of a unit pack [cm]: 6
Height of a unit pack [cm]: 10.5
Weight of a cardboard box [kg]: 6.39
Width of a cardboard box [cm]: 33
Height of a cardboard box [cm]: 24.5
Length of a cardboard box [cm]: 66
Volume of a cardboard box [m³]: 0.053361

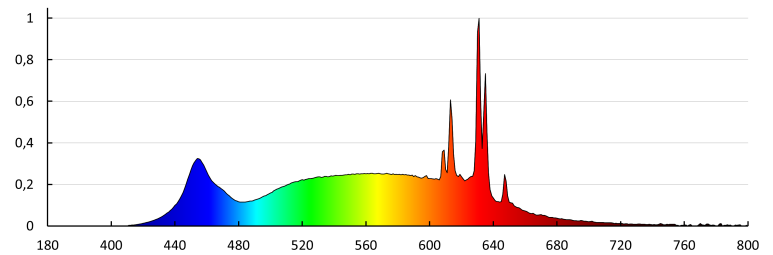

KANLUX S.A. (kat 36677) IQ-LED A60 7,8W-NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36677) IQ-LED A60 7,8W-NW
Lampy: 1 x IQ-LED A60 7,8W-NW

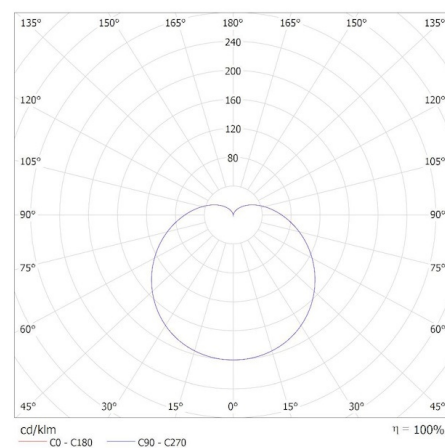

Date of issue: 02.02.2024, 18:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN