

Kanlux ul. Objazdowa 1-3, 41-922 Radzionków, Poland

36690 IQ-LED G45E14 3,4W-CW

LED light source 5905339366900











IQ-LED G45E14 3,4W













Kanlux IQ-LED G45 is an eye-friendly color temperature and reliability, all preserved in classic ball design. New iQ-LED Kanlux bulbs it also has exceptional luminous efficiency, up to 138 lumens per Watt, and therefore lower energy consumption. IQ-LED Kanlux G45 is available in a version with a cup E14 and E27, these light sources provide complete comfort use and safety.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED

Non-directional or directional light source : NDLS

Mains or non-mains light source: MLS Connected light source (CLS): no Colour-tuneable light source: no High luminance light source: no

Anti-glare shield: no

Dimmable: no

PRODUCT PARAMETERS:

Colour: white

Compatible with a dimmer: no

Width [mm]: 45 Height [mm]: 82 Depth [mm]: 45 Diameter [mm]: 45

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Lamp rated current [mA]: 30

Rated power [W]: 3.4

Total rated luminous flux [lm]: 470

Rated beam angle [°]: 150

Material: plastic

Lampshade material: plastic

Light source: G45 **Diode type**: LED SMD

Colour temperature: cold white

Cap: E14

Rated lamp-service life [h]: 25000

Date of issue: 02.02.2024, 15:35

We reserve the right to make technical changes. The data contained in this material are not legally binding. Photometry: the results obtained from testing were from a specific sample.







Kanlux ul. Objazdowa 1-3, 41-922 Radzionków, Poland

36690 IQ-LED G45E14 3,4W-CW

LED light source





Number of on/off cycles: ≥ 50000

Light source shape: kulka

Additional information: Light source (LS)

Mercury content: no

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 4

Energy efficiency class: D

Useful luminous flux of the light source Φ use [lm]: 470 Useful luminous flux of the light source Φ use [lm]: in sphere

(360°)

Correlated colour temperature [K]: 6500 Colour consistency in McAdam ellipses: 6 On-mode power of the light source Pon [W]: 3.4

Height of the light source [mm]: 82 Width of the light source [mm]: 45 Depth of the light source [mm]: 45

Colour rendering index: 90

Chromaticity coordinates (x): 0.313 Chromaticity coordinates (y): 0.337 Claim of equivalent power [W]: 40 R9 colour rendering index value: 97

Survival factor: 0,9

The lumen maintenance factor: 0,96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

Displacement factor (cos φ1): 0,5

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

Flicker metric (Pst LM): 1,0

Stroboscopic effect metric (SVM): 0.4

LOGISTIC DATA:

Unit of measurement: unit Packaging method: 10

Number of units in the secondary packaging: 10

Number of units in the packaging: 100

Net unit weight [g]: 18

Date of issue: 02.02.2024, 15:35






36690 IQ-LED G45E14 3,4W-CW

LED light source

Grammage [g]: 36.6

Length of a unit pack [cm]: 4.5 Width of a unit pack [cm]: 4.5 Height of a unit pack [cm]: 8

Weight of a cardboard box [kg]: 3.66 Width of a cardboard box [cm]: 25.5 Height of a cardboard box [cm]: 19 Length of a cardboard box [cm]: 51 Volume of a cardboard box [m3]: 0.02471

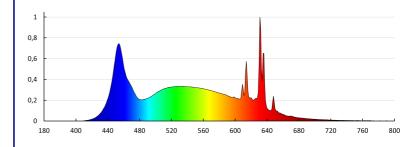

KANLUX S.A. (kat 36690) IQ-LED G45E14 3,4W-CW / Krzywa rozsyłu światła (biegunowo)

