


36947 HR-LH-WW-W-NT

Linear LED luminaire

5905339369475

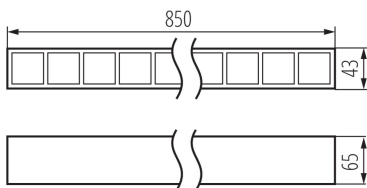

HIERRO is a family of fixtures produced at the Kanlux Factory. The minimalist and elegant form fits into the latest trends in architectural design. The stylish solution is widely used in modern offices, shops, and loft spaces as basic, complementary or accent lighting. The great advantages of HIERRO luminaires are: variety of available control and installation methods, low UGR coefficient, high luminous efficiency, ability to adapt to specific lighting projects and 5-year warranty. This allows you to create energy-saving and modern lighting systems that provide attractive lighting effects.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 850

Width [mm]: 43

Height [mm]: 65

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 42

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 4950

Colour temperature: Warm white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X60/Y60

Ambient temperature range to which the product can be exposed: $5 \div 25$

Shade type: louvre / white

Enclosure material: steel, plastic

Connection type: Self-clamping block



Range of sections of wires used [mm²]: $1,5 \div 2,5$

IP class: 20

UGR: < 17

36947 HR-LH-WW-W-NT

Linear LED luminaire

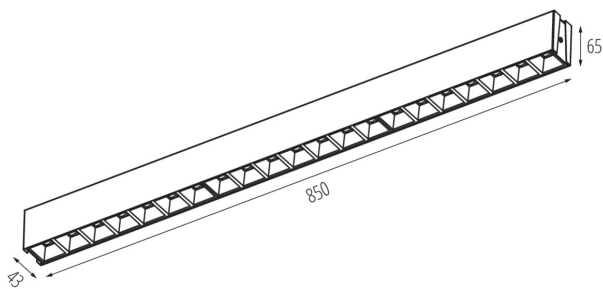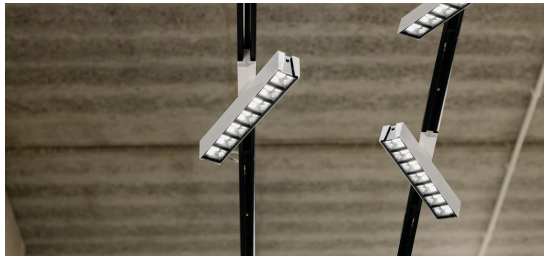

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 1520

Grammage [g]: 1920

Weight of a cardboard box [kg]: 1.92

KANLUX S.A. (kat 36947) HR-LH-WW-W-NT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 36947) HR-LH-WW-W-NT
Lampa: 1 x HR-LH-WW-W

