

37058 HR-ML-NW-W-PT

Linear LED luminaire

5905339370587



HIERRO is a family of fixtures produced at the Kanlux Factory. The minimalist and elegant form fits into the latest trends in architectural design. The stylish solution is widely used in modern offices, shops, and loft spaces as basic, complementary or accent lighting. The great advantages of HIERRO luminaires are: variety of available control and installation methods, low UGR coefficient, high luminous efficiency, ability to adapt to specific lighting projects and 5-year warranty. This allows you to create energy-saving and modern lighting systems that provide attractive lighting effects.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

Fixture lighting direction: down

Length [mm]: 595

Width [mm]: 70

Height [mm]: 52

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 18

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux [lm]: 2450

Colour temperature: white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: X60/Y60

Ambient temperature range to which the product can be exposed: $5 \div 25$

Shade type: louvre / white

Enclosure material: steel, plastic

Connection type: Self-clamping block



Range of sections of wires used [mm²]: $1,5 \div 2,5$

IP class: 20

UGR: <17

37058 HR-ML-NW-W-PT

Linear LED luminaire

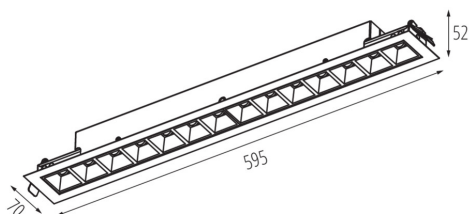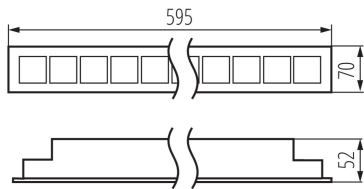

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 1000

Grammage [g]: 1180

Weight of a cardboard box [kg]: 1.18

KANLUX S.A. (kat 37058) HR-ML-NW-W-PT / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37058) HR-ML-NW-W-PT
Lampa: 1 x HR-ML-NW-W

