


37124 HR-MM-WN-W-RM

Linear LED luminaire

5905339371249

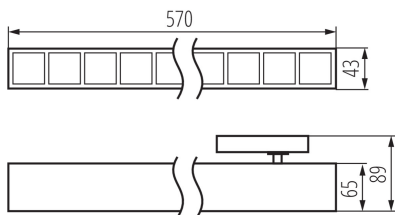

HIERRO is a family of fixtures produced at the Kanlux Factory. The minimalist and elegant form fits into the latest trends in architectural design. The stylish solution is widely used in modern offices, shops, and loft spaces as basic, complementary or accent lighting. The great advantages of HIERRO luminaires are: variety of available control and installation methods, low UGR coefficient, high luminous efficiency, ability to adapt to specific lighting projects and 5-year warranty. This allows you to create energy-saving and modern lighting systems that provide attractive lighting effects.

PRODUCT PARAMETERS:


Colour: white
Place of assembly: rail
Place of application: Indoors
Minimum distance from the illuminated object : 0,5m
Compatible with a dimmer : no
Fixture lighting direction: down
Length [mm]: 570
Width [mm]: 43
Height [mm]: 89
Integrated LED light source : yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 23
Class of protection against electric shock : II
Lampshade material: plastic
Diode type: LED SMD
Luminous flux [lm]: 2900
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life : L90B10
Number of on/off cycles : ≥30000
Lighting angle [°]: X60/Y60
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: louvre / white
Enclosure material: steel, plastic
IP class: 20
UGR: <17

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3500
Colour consistency in McAdam ellipses : ≤6

37124 HR-MM-WN-W-RM

Linear LED luminaire

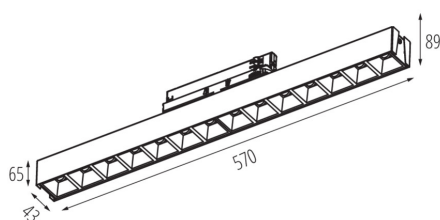

Colour rendering index: 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 820

Grammage [g] : 1040

Weight of a cardboard box [kg] : 1.04

KANLUX S.A. (kat 37124) HR-MM-WN-W-RM / Krzywa rozsyłu światła
(biegunowo)Oprawa: KANLUX S.A. (kat 37124) HR-MM-WN-W-RM
Lampy: 1 x HR-MM-WN-W