


37170 BLINGO 34W 3740 60WW

Recessed-mounted LED panel

5905339371706



Kanlux BLINGO LED v2 are backlight panels. They are equipped with a junction box with a quick connector, which allows for pass-through connection of panels and speeds up their installation. In the new models of the well-known Kanlux BLINGO LED v2 panels, we have introduced an integrated power supply, thanks to which we can place them in an appropriate Kanlux ADTR frame and perform surface-mounting of the panels. BLINGO LED v2 panels have a grooved frame and higher luminous efficiency than their previous versions (Kanlux BLINGO LED).

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 34
Power factor: 0.92
Luminous flux of the light fitting [lm]: 3740
Luminous efficiency of the lamp [lm/W]: 110
Skuteczność świetlna [lm/W]: 110
Lighting angle [°]: 115
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses : 6
Colour temperature: Warm white
Colour rendering index: 80
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life : L70B50
Number of on/off cycles: ≥50000
Diode type: LED SMD
Colour: white
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Feeder included: yes
Length [mm]: 595
Width [mm]: 595
Height [mm]: 25

Date of issue: 02.07.2025, 10:15


We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

37170 BLINGO 34W 3740 60WW

Recessed-mounted LED panel



		BLINGO LED		
		BLINGO 34W 4080	BLINGO U34W 4080	BLINGO 38W 4560
ACCESSORIES		120NW	120N	120NW
SPN PANEL 120	37336	v	v	v
CLIPS PANEL 120	37338	v	v	v
ADTR 12030 B	27614	v	v	v
ADTR 12030 SR	27612	v	v	v
ADTR 12030 W	27611	v	v	v
ADTR-H 12030 B	33391	v	v	v
ADTR-H 12030 SR	33392	v	v	v
ADTR-H 12030 W	33390	v	v	v

BLINGO								
	BLINGO 24W 4320 60NW	BLINGO U24W 4000 60NW	BLINGO 34W 3740 60WW	BLINGO 34W 4080 60NW	BLINGO 34W 4080 60CW	BLINGO U34W 4080 60NW	BLINGO 38W 4560 60NW	
ACCESSORIES	index	37178	37179	37170	37171	37172	37173	37176
SPN PANEL 60-62	37335	v	v	v	v	v	v	v
CLIPS PANEL 60-62	37337	v	v	v	v	v	v	v
ADTR 6060 B	27615	v	v	v	v	v	v	v
ADTR 6060 SR	27610	v	v	v	v	v	v	v
ADTR 6060 W	27613	v	v	v	v	v	v	v
ADTR-S 6060 W	27616	v	v	v	v	v	v	v
ADTR-H 6060 B	29845	v	v	v	v	v	v	v
ADTR-H 6060 SR	29844	v	v	v	v	v	v	v
ADTR-H 6060 W	29843	v	v	v	v	v	v	v
ADTR-S-H 6060 W	27617	v	v	v	v	v	v	v
ADTR-H 76MM 6060 W	33398	v	v	v	v	v	v	v

Integrated LED light source: yes

Class of protection against electric shock: I

Lampshade material: plastic

Enclosure material: steel

Panel/frame material: steel

Ambient temperature range to which the product can be exposed: 5÷25

Range of sections of wires used [mm²]: 1-2,5

IP class: 20

Kształt: square

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: The control panel or control equipment can be replaced by the end user

Additional information: Containing product (CP)

Mercury content in the lamp [mg]: 0

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): E

Number of modules (LED light source): 1

Useful luminous flux of the light source Φuse [lm]: 4480

Useful luminous flux of the light source Φuse [lm]: in sphere (360°)

Survival factor: 0,9

The lumen maintenance factor: 0,96

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1300

Date of issue: 02.07.2025, 10:15

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


37170 BLINGO 34W 3740 60WW

Recessed-mounted LED panel

Grammage [g]: 1742
Length of a unit pack [cm]: 60
Width of a unit pack [cm]: 3
Height of a unit pack [cm]: 61.5
Weight of a cardboard box [kg]: 8.71
Width of a cardboard box [cm]: 17.5
Height of a cardboard box [cm]: 63
Length of a cardboard box [cm]: 61.5
Volume of a cardboard box [m³]: 0.067804


ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

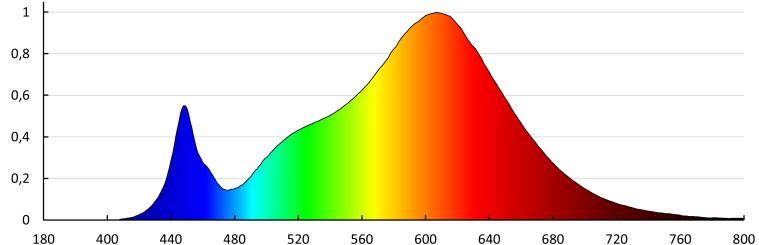

KANLUX S.A. (kat 37170) BLINGO 34W 3740 60WW / Krzywa rozszeru światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37170) BLINGO 34W 3740 60WW
Lampy: 1 x BLINGO 34W 3740 60WW

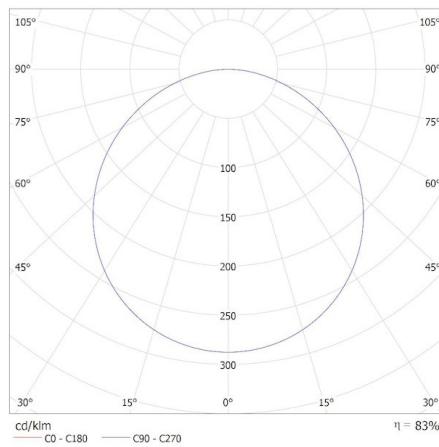

Date of issue: 02.07.2025, 10:15

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com