


37198 OS-M8D-WN-RX-B-P1

Oprawa LED podtynkowa

5905339371980

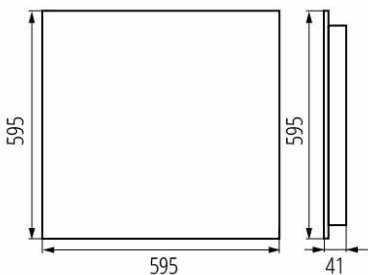

PRODUCT PARAMETERS:

- Colour:** black
Place of assembly: Recessed mount in the ceiling
Place of application: Indoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Length [mm]: 595
Width [mm]: 595
Height [mm]: 41
Integrated LED light source: yes
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 40
Class of protection against electric shock: I
Lampshade material: plastic
Diode type: LED SMD
Luminous flux of the light fitting [lm]: 4800
Colour temperature: neutral warm white
Service life [h]: 50000
Luminous-flux-retention factor at the end of rated service life: L90B10
Number of on/off cycles: ≥ 30000
Lighting angle [°]: 80
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: louvre / black
Enclosure material: Metal
Connection type: Self-clamping block
Range of sections of wires used [mm²]: 1,5÷2,5
Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
IP class: 20
Additional information: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

- Correlated colour temperature [K]:** 3500
Colour consistency in McAdam ellipses: ≤ 3
Colour rendering index: 80

LOGISTIC DATA:

- Unit of measurement:** unit

37198 OS-M8D-WN-RX-B-P1

Oprawa LED podtynkowa



Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

KANLUX S.A. (kat 37198) OS-M8D-WN-RX-B-P1 / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 37198) OS-M8D-WN-RX-B-P1
Lampy: 4 x OS-M8D-WN

