


37283 KMCCB-RT-200A

MCCB molded case circuit breaker

5905339372833



PRODUCT PARAMETERS:

Rated voltage [V]: 230/415 AC

Rated frequency [Hz]: 50

Rated current [A]: 200

Utilisation category: A

Place of assembly: mounting plate

IP class: 20

Znamionowa graniczna zwarciova zdolność łączeniowa Icu :
36kA (380/415V AC); 50kA (220/230V AC)

Prąd znamionowy wyłączalny zwarciovy roboczy Ics : 27kA
(380/415V AC); 36kA (220/230V AC)

Length [mm]: 107

Width [mm]: 99

Height [mm]: 165

Connection type: Terminal block

Control type: mechaniczne

Rated breaking voltage Ue [V]: 380/415; 220/230

Rated insulation voltage UI [V]: 800

Rated impulse withstand voltage Uimp [V]: 8000

Number of poles: 3

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 12

Number of units in the secondary packaging : 1

Number of units in the packaging : 12

Net unit weight [g]: 1672

Grammage [g]: 1784.17

Gross unit weight [g]: 1742

Length of a unit pack [cm]: 17.5

Width of a unit pack [cm]: 12

Height of a unit pack [cm]: 11

Weight of a cardboard box [kg]: 21.41004

Width of a cardboard box [cm]: 36.5

Height of a cardboard box [cm]: 24


Length of a cardboard box [cm]: 37

Volume of a cardboard box [m³]: 0.032412

37283 KMCCB-RT-200A

MCCB molded case circuit breaker

125A, 160A: 6Nm
250A: 12Nm
400A: 20Nm

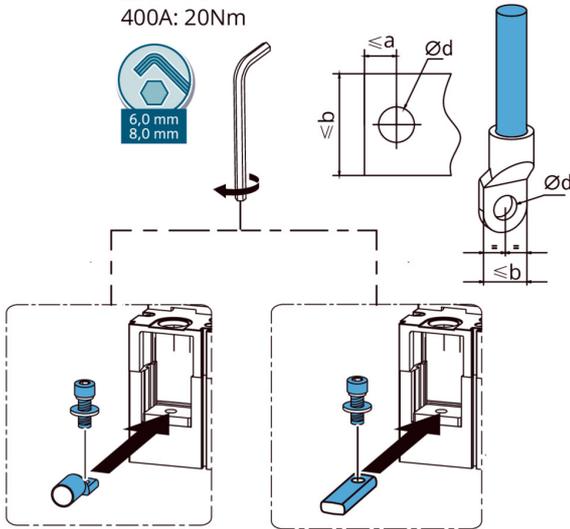

Unit:mm

No.	Frame size	Terminal block Width b	Terminal block Inner hole d	Terminal block Hole margin a
1	125	16	Ø 9	7
2	160	17	Ø 9	7
3	250	22	Ø 9	9
4	400	30	Ø 11	12.4



3P:
125A: 6x M8x16mm
160A, 250A: 6x M8x20mm
400A: 6x M10x30mm

4P:
125A: 8x M8x16mm
160A, 250A: 8x M8x20mm
400A: 8x M10x30mm