

37440 KN-S6D-WW-W-P1

Recessed - Mounted LED Office Fixture

5905339374400



KN-W-P1



PRODUCT PARAMETERS:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 39

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 19

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 2800

Colour temperature: Warm white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 60

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: soczewka

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

IP class: 20

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)



Luminous efficiency of the lamp [lm/W]: 147

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 3000

37440 KN-S6D-WW-W-P1

Recessed - Mounted LED Office Fixture

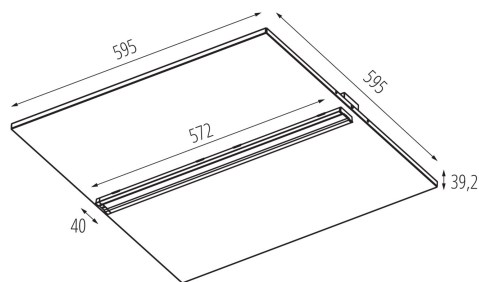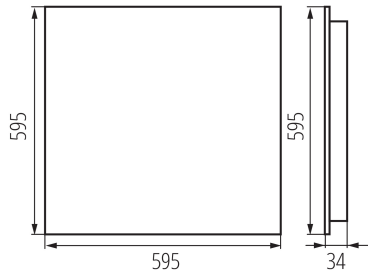

Colour consistency in McAdam ellipses : 6

Colour rendering index : 80

LOGISTIC DATA:

Unit of measurement: unit

Packaging method : 1

Number of units in the secondary packaging : 1

Number of units in the packaging : 1

Net unit weight [g] : 2260

Grammage [g] : 2330

Gross unit weight [g] : 2330

Length of a unit pack [cm] : 63

Width of a unit pack [cm] : 61

Height of a unit pack [cm] : 5.5

Weight of a cardboard box [kg] : 2.33

Width of a cardboard box [cm] : 61

Height of a cardboard box [cm] : 5.5

Length of a cardboard box [cm] : 63

Volume of a cardboard box [m³] : 0.021137

KANLUX S.A. (kat 37440) KN-S6D-WW-W-P1 / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 37440) KN-S6D-WW-W-P1
Lampy: 1 x KN-S6D-WW-W-P1

