

37459 KN-L6D-NW-B-P1

Recessed - Mounted LED Office Fixture

5905339374592



KN-B-P1



PRODUCT PARAMETERS:

Colour: black

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 595

Width [mm]: 595

Height [mm]: 39

Integrated LED light source: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 25

Class of protection against electric shock: I

Lampshade material: plastic

Diode type: LED SMD

Luminous flux of the light fitting [lm]: 3600

Colour temperature: white

Service life [h]: 50000

Luminous-flux-retention factor at the end of rated service life: L90B10

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 60

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: soczewka

Enclosure material: Metal

Connection type: Self-clamping block

Range of sections of wires used [mm²]: 1,5÷2,5

IP class: 20

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

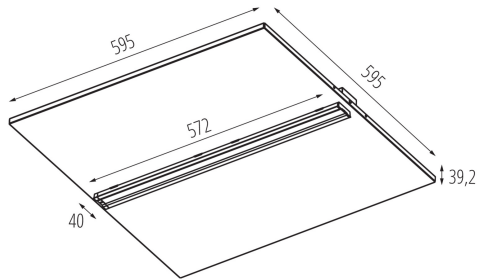
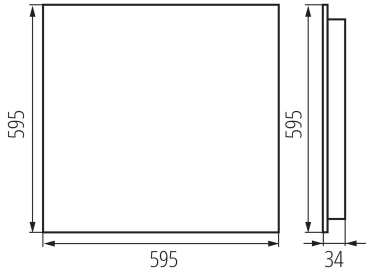
Luminous efficiency of the lamp [lm/W]: 144

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 4000

37459 KN-L6D-NW-B-P1

Recessed - Mounted LED Office Fixture

**Colour consistency in McAdam ellipses : 6****Colour rendering index : 80****LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1**Number of units in the secondary packaging :** 1**Number of units in the packaging :** 1**Net unit weight [g] :** 2260**Grammage [g] :** 2330**Gross unit weight [g] :** 2330**Length of a unit pack [cm] :** 63**Width of a unit pack [cm] :** 61**Height of a unit pack [cm] :** 5.5**Weight of a cardboard box [kg] :** 2.33**Width of a cardboard box [cm] :** 61**Height of a cardboard box [cm] :** 5.5**Length of a cardboard box [cm] :** 63**Volume of a cardboard box [m³] :** 0.021137

KANLUX S.A. (kat 37459) KN-L6D-NW-B-P1 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 37459) KN-L6D-NW-B-P1
Lampy: 1 x KN-LxD-NW-P1