


38034 PLAVE LED CCT+RGB

LED lighting fixture with fan

5905339380340



We present the modern Kanlux PLAVE ceiling lamp, which will not only illuminate your rooms, but will also adapt to your mood and needs. This versatile ceiling fixture allows you to adjust the color and intensity of light, so you can create the perfect atmosphere for any occasion. Additionally, the night mode provides gentle lighting in the dark, perfect for a bedroom or corridor. What's more Kanlux PLAVE is equipped in build-in fan with five-stage airflow power regulation, ensuring air circulation in the room. Controlling all functions is extremely simple thanks to the included remote control, which allows convenient operation of the lamp. If it's still not enough, choose the Kanlux PLAVE LED CCT+RGB version and change the light colors according to your mood. Kanlux PLAVE is friendly to your wallet, consuming a maximum of about 60W at full light intensity and maximum fan speed.

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 48

Luminous flux of the light fitting [lm]: 1032 (WW) / 2110 (NW) / 1154 (CW)

Lighting angle [°]: 150

Correlated colour temperature [K]: 3000/4000/6500/RGB

Colour consistency in McAdam ellipses: 6

Colour temperature: Warm white, white, cold white, RGB

Colour rendering index: 80

Service life [h]: 25000

Number of on/off cycles: ≥20000

Diode type: LED SMD

Colour: black/white

Place of assembly: ceiling mounted

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Built-in brightness control: yes

Compatible with a dimmer: no

Control: infrared remote control


Time switch: yes

Height [mm]: 150

Diameter [mm]: 485

38034 PLAVE LED CCT+RGB

LED lighting fixture with fan



Integrated LED light source: yes

Class of protection against electric shock: II

Lampshade material: plastic

Enclosure material: plastic

Night Light function: max 2W / max 100lm / 2700K

Ambient temperature range to which the product can be exposed: 5÷25

Engine rotation: 980

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1,5

Sound pressure [dB]: max 39

Air-flow volume rate [m³/min]: 33,6

Motor-power consumption [W]: max 15

IP class: 20

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Additional information: Containing product (CP)

Mercury content: no

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): E

Survival factor: 0,9

The lumen maintenance factor: 0,96

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 2

Number of units in the secondary packaging: 1

Number of units in the packaging: 2

38034 PLAVE LED CCT+RGB

LED lighting fixture with fan

Net unit weight [g] : 1648

Grammage [g] : 2475

Gross unit weight [g] : 2200

Length of a unit pack [cm] : 51

Width of a unit pack [cm] : 15

Height of a unit pack [cm] : 51



Weight of a cardboard box [kg] : 4.95

Width of a cardboard box [cm] : 31.5

Height of a cardboard box [cm] : 53

Length of a cardboard box [cm] : 52

Volume of a cardboard box [m³] : 0.086814

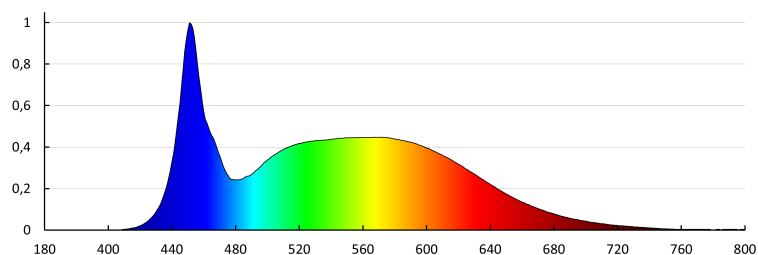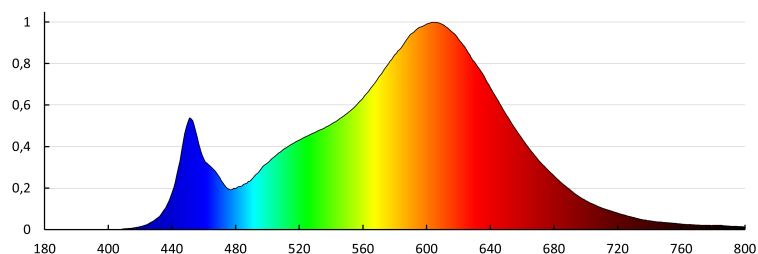


38034 PLAVE LED CCT+RGB

LED lighting fixture with fan


KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - ww / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - ww
Lampy: 1 x PLAVE LED CCT+RGB - ww

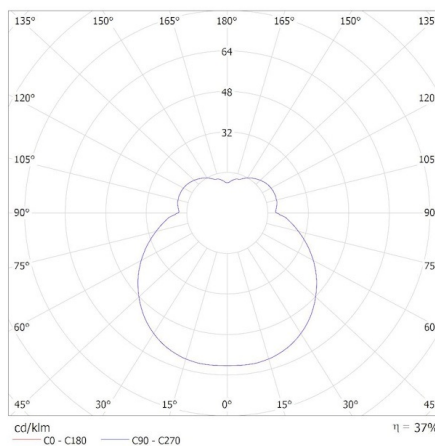

KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - nw / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - nw
Lampy: 1 x PLAVE LED CCT+RGB - nw

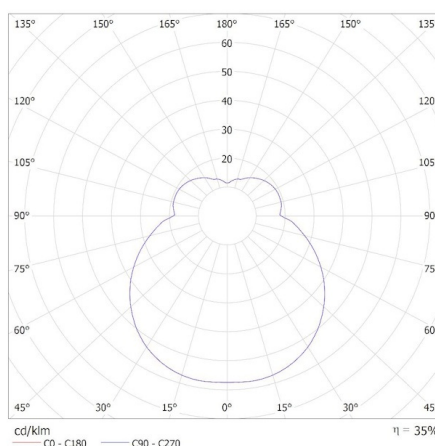

38034 PLAVE LED CCT+RGB

LED lighting fixture with fan

KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - cw / Krzywa rozsyłu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 38034) PLAVE LED CCT+RGB - cw
Lampy: 1 x PLAVE LED CCT+RGB - cw

