


38255 KMCCB-RT-400A

MCCB molded case circuit breaker

5905339382559

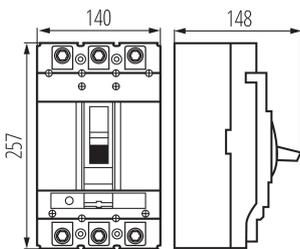

PRODUCT PARAMETERS:

Rated voltage [V]: 415 AC

Rated frequency [Hz]: 50

Rated current [A]: 400

Utilisation category: A

Place of assembly: mounting plate

IP class: 20

Znamionowa graniczna zwarciova zdolnośc łączeniowa Icu :
65kA

Prąd znamionowy wyłączalny zwarciovy roboczy Ics : 50kA

Length [mm]: 140

Width [mm]: 148

Height [mm]: 257

Connection type: Terminal block

Control type: mechaniczne

Rated breaking voltage Ue [V]: 380/400/415

Rated insulation voltage UI [V]: 1000

Rated impulse withstand voltage Uimp [V]: 8000

Number of poles: 3

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging : 1

Number of units in the packaging : 4

Net unit weight [g] : 5000

Grammage [g] : 5330

Gross unit weight [g] : 5184

Length of a unit pack [cm] : 27

Width of a unit pack [cm] : 17

Height of a unit pack [cm] : 17

Weight of a cardboard box [kg] : 21.32

Width of a cardboard box [cm] : 30

Height of a cardboard box [cm] : 37


Length of a cardboard box [cm] : 35

Volume of a cardboard box [m³] : 0.03885

38255 KMCCB-RT-400A

MCCB molded case circuit breaker

125A, 160A: 6Nm
250A: 12Nm
400A: 20Nm

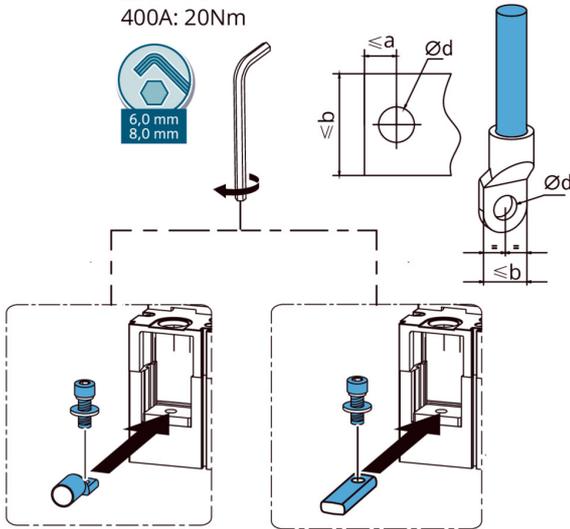

Unit:mm

| No. | Frame size | Terminal block Width b | Terminal block Inner hole d | Terminal block Hole margin a |
|-----|------------|------------------------|-----------------------------|------------------------------|
| 1 | 125 | 16 | Ø 9 | 7 |
| 2 | 160 | 17 | Ø 9 | 7 |
| 3 | 250 | 22 | Ø 9 | 9 |
| 4 | 400 | 30 | Ø 11 | 12.4 |



3P:
125A: 6x M8x16mm
160A, 250A: 6x M8x20mm
400A: 6x M10x30mm

4P:
125A: 8x M8x16mm
160A, 250A: 8x M8x20mm
400A: 8x M10x30mm