


38256 KMCCB-RT-400A-H

MCCB molded case circuit breaker

5905339382566



PRODUCT PARAMETERS:

Rated voltage [V]: 415 AC

Rated frequency [Hz]: 50

Rated current [A]: 400

Utilisation category: A

Place of assembly: mounting plate

IP class: 20

Znamionowa graniczna zwarciova zdolnośc łączeniowa Icu :
100kA

Prąd znamionowy wyłączalny zwarciovy roboczy Ics : 75kA

Length [mm]: 140

Width [mm]: 148

Height [mm]: 257

Connection type: Terminal block

Control type: mechaniczne

Rated breaking voltage Ue [V]: 380/400/415

Rated insulation voltage UI [V]: 1000

Rated impulse withstand voltage Uimp [V]: 8000

Number of poles: 3

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 4

Number of units in the secondary packaging : 1

Number of units in the packaging : 4

Net unit weight [g]: 5000

Grammage [g]: 5330

Gross unit weight [g]: 5184

Length of a unit pack [cm]: 27

Width of a unit pack [cm]: 17

Height of a unit pack [cm]: 17

Weight of a cardboard box [kg]: 21.32

Width of a cardboard box [cm]: 30

Height of a cardboard box [cm]: 37


Length of a cardboard box [cm]: 35

Volume of a cardboard box [m³]: 0.03885

38256 KMCCB-RT-400A-H

MCCB molded case circuit breaker

125A, 160A: 6Nm
250A: 12Nm
400A: 20Nm

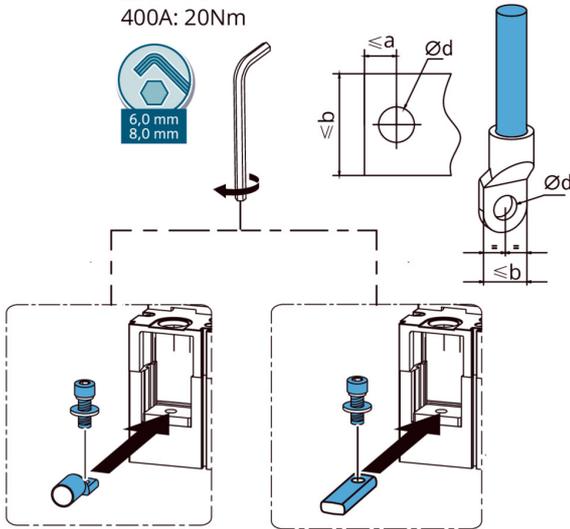

Unit:mm

No.	Frame size	Terminal block Width b	Terminal block Inner hole d	Terminal block Hole margin a
1	125	16	Ø 9	7
2	160	17	Ø 9	7
3	250	22	Ø 9	9
4	400	30	Ø 11	12.4



3P:
125A: 6x M8x16mm
160A, 250A: 6x M8x20mm
400A: 6x M10x30mm

4P:
125A: 8x M8x16mm
160A, 250A: 8x M8x20mm
400A: 8x M10x30mm