


38258 KMCCB-RT-400A-4P-H

MCCB molded case circuit breaker

5905339382580



PRODUCT PARAMETERS:

Rated voltage [V]: 415 AC

Rated frequency [Hz]: 50

Rated current [A]: 400

Utilisation category: A

Place of assembly: mounting plate

IP class: 20

Znamionowa graniczna zwarciova zdolnoř łączeniowa Icu :
100kA

Prąd znamionowy wyłączalny zwarciovy roboczy Ics : 75kA

Length [mm]: 184

Width [mm]: 148

Height [mm]: 257

Connection type: Terminal block

Control type: mechaniczne

Rated breaking voltage Ue [V]: 380/400/415

Rated insulation voltage Ui [V]: 1000

Rated impulse withstand voltage Uimp [V]: 8000

Number of poles: 3+N

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 2

Number of units in the secondary packaging : 1

Number of units in the packaging : 2

Net unit weight [g] : 6365

Gross weight [g] : 6850

Gross unit weight [g] : 6585

Length of a unit pack [cm] : 27.5

Width of a unit pack [cm] : 21.5

Height of a unit pack [cm] : 17

Weight of a cardboard box [kg] : 13.7

Width of a cardboard box [cm] : 30

Height of a cardboard box [cm] : 20


Length of a cardboard box [cm] : 44.5

Volume of a cardboard box [m³] : 0.0267

38258

KMCCB-RT-400A-4P-H

MCCB molded case circuit breaker

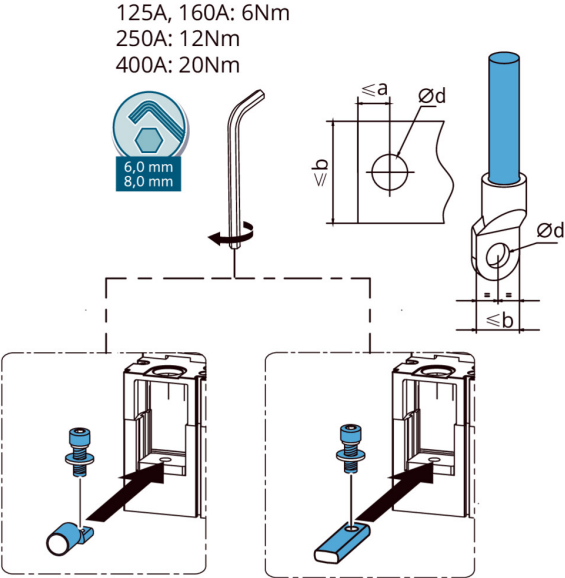

Unit:mm

No.	Frame size	Terminal block Width b	Terminal block Inner hole d	Terminal block Hole margin a
1	125	16	$\varnothing 9$	7
2	160	17	$\varnothing 9$	7
3	250	22	$\varnothing 9$	9
4	400	30	$\varnothing 11$	12.4



- 3P:
125A: 6x M8x16mm
160A, 250A: 6x M8x20mm
400A: 6x M10x30mm
- 4P:
125A: 8x M8x16mm
160A, 250A: 8x M8x20mm
400A: 8x M10x30mm