

**38393 LTL 38W-114-CCT-ADJ-B**

Track light projector

5905339383938

**Switch Power**

The new KANLUX LTL TRACKLIGHT family of luminaires is an innovative solution based on Kanlux TEAR rails, ideal for commercial and architectural lighting systems. The integrated LED luminaire with high luminous efficacy of 140 lm/W guarantees excellent energy efficiency, which is confirmed by a 5-year warranty. The luminaires allow you to choose lenses with an angle of 90° (standard) or 60°. Thanks to the high color rendering index CRI 90, the luminaire ensures faithful color reproduction, which is crucial in spaces where precise lighting is of great importance.


The KANLUX LTL 42W-114-CCT-ADJ model is distinguished by an additional function of changing the light direction by up to 45°, which allows for flexible directing of the light to selected points. In turn, the minimalist version of KANLUX LTL 40W-114 CCT allows you to create a flat light line of any length, without visible gaps between modules. This is the ideal solution for aesthetic and functional lighting installations.

The luminaires are equipped with an adapter with DIPSWITCH switches, which allows easy selection of power and color temperature (in the range of 3000K, 3500K and 4000K) without the need to modify the installation. This modern and versatile solution will work well in office, retail and exhibition spaces, offering users full control over the quality and character of lighting.

**PRODUCT PARAMETERS:****Colour:** black**Place of assembly:** na szynę TEAR**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** no**Length [mm]:** 1144**Width [mm]:** 61**Height [mm]:** 84**Integrated LED light source:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** max 38**Class of protection against electric shock:** II**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** max 5000 / 5245 / 5325**Colour temperature:** Warm white, white**Service life [h]:** 50000**Number of on/off cycles:** ≥30000

**38393 LTL 38W-114-CCT-ADJ-B**

Track light projector

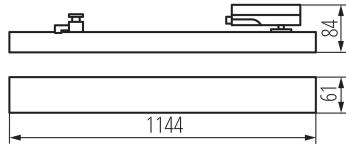**Lighting angle [°]:** 90**Ambient temperature range to which the product can be exposed:** 5+25**Enclosure material:** aluminum alloy**Lighting-fixture angle regulation [°]:** +45/-45**IP class:** 20**Additional information:** Containing product (CP)**PARAMETERS FOR LED AND OLED LIGHT SOURCES:****Energy efficiency class of the light source in the contains product (CP):** D**Correlated colour temperature [K]:** 3000 / 3500 / 4000**Colour consistency in McAdam ellipses :** 6**Colour rendering index:** 90**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 12**Number of units in the secondary packaging :** 1**Number of units in the packaging :** 12**Net unit weight [g]:** 1260**Grammage [g]:** 1655.83**Gross unit weight [g]:** 1544**Length of a unit pack [cm]:** 117**Width of a unit pack [cm]:** 10.5**Height of a unit pack [cm]:** 8.5**Weight of a cardboard box [kg]:** 19.86996**Width of a cardboard box [cm]:** 37**Height of a cardboard box [cm]:** 34.5**Length of a cardboard box [cm] :** 119**Volume of a cardboard box [m³]:** 0.151904**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website


## 38393 LTL 38W-114-CCT-ADJ-B

### Track light projector



#### POWER SELECTION



#### CCT SELECTION



$I_{out}$ [mA]	1	2	3	4	$T_c$	[W]	[lm]
300	-	-	-	-	3000K 3500K 4000K	11,3 10,9 11,2	1505 1565 1590
350	-	-	-	ON	3000K 3500K 4000K	13,1 12,7 13,1	1765 1850 1880
400	-	-	ON	-	3000K 3500K 4000K	14,9 14,3 14,8	2015 2115 2150
450	-	-	ON	ON	3000K 3500K 4000K	16,7 16,2 16,7	2275 2405 2425
500	-	ON	-	-	3000K 3500K 4000K	18,6 17,9 18,5	2525 2660 2695
550	-	ON	-	ON	3000K 3500K 4000K	20,5 19,8 20,4	2780 2915 2965
600	-	ON	ON	-	3000K 3500K 4000K	22,1 21,3 22,1	3005 3165 3200
650	-	ON	ON	ON	3000K 3500K 4000K	24 23,1 23,9	3240 3405 3450
700	ON	-	-	-	3000K 3500K 4000K	26,1 25,2 26,1	3775 3720 3775
750	ON	-	-	ON	3000K 3500K 4000K	27,9 27 27,9	3770 4045 4010
800	ON	-	ON	-	3000K 3500K 4000K	29,6 28,5 29,5	3980 4160 4230
850	ON	-	ON	ON	3000K 3500K 4000K	31,4 30,3 31,3	4190 4400 4470
900	ON	ON	-	-	3000K 3500K 4000K	33 31,9 33	4390 4610 4680
950	ON	ON	-	ON	3000K 3500K 4000K	34,9 33,6 34,8	4610 4830 4905
1000	ON	ON	ON	-	3000K 3500K 4000K	36,4 35,1 36,3	4795 5030 5105
1050	ON	ON	ON	ON	3000K 3500K 4000K	38 37 38	5000 5245 5325

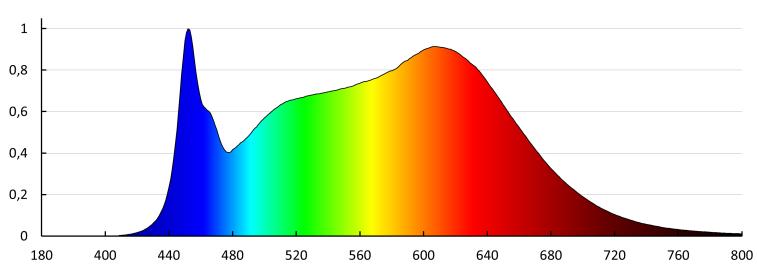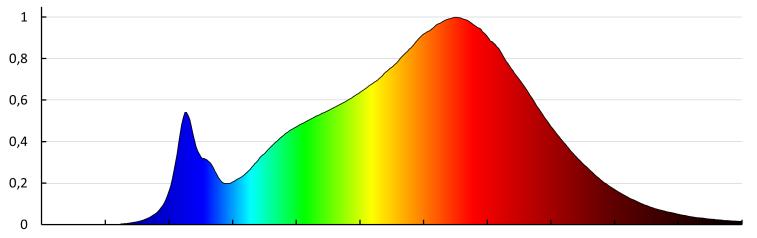

#### ACCESSORIES

38395

LTL LENS SET AS 35X35



Soczewka do oprawy LTL, asymetryczna kąt 35 stopni x 35 stopni, w zestawie 4 szt, LTL LENS SET AS 35X35D (38395)

38394

LTL LENS SET S 60D



Soczewka do oprawy LTL z kątem świecenia 60 stopni, w zestawie 4 szt, LTL LENS SET S 60D (38394)