


03843 DB112F 1X12P/FMD

DB-series distribution board

5905339038432

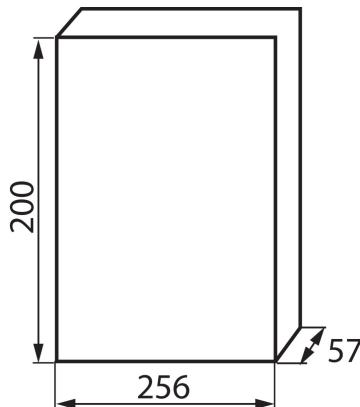

DB series switchboards, meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections.

PRODUCT PARAMETERS:

Colour: white / grey

Door colour: grey

Place of assembly: Recessed mount in the wall

Norm: PN-EN 62208

Rated voltage [V]: 230/400 AC

Rated current [A]: 63

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Number of modules: 12P

Temperature resistance [°C]: 650

IK class: 06

IP class: 40

number of rows: 1

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10

Net unit weight [g]: 640

Grammage [g]: 840

Length of a unit pack [cm]: 29

Width of a unit pack [cm]: 23

Height of a unit pack [cm]: 10.5

Weight of a cardboard box [kg]: 8.4

Width of a cardboard box [cm]: 30.5

Height of a cardboard box [cm]: 47

Length of a cardboard box [cm]: 54

Volume of a cardboard box [m³]: 0.077409

IDEAL^{TS}

by **Kanlux**

ul. Objazdowa 1-3, 41-922 Radzionków, Poland

03843 DB112F 1X12P/FMD

DB-series distribution board

Date of issue: 15.11.2022, 13:00

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

EN