


38516 KMCCB-RT-125A-4P

MCCB molded case circuit breaker

5905339385161



PRODUCT PARAMETERS:

Rated voltage [V]: 230/415 AC

Rated frequency [Hz]: 50

Rated current [A]: 125

Utilisation category: A

Place of assembly: mounting plate

IP class: 20

Znamionowa graniczna zwarciova zdolność łączeniowa Icu :
25kA (380/415V AC); 36kA (220/230V AC)

Prąd znamionowy wyłączalny zwarciovy roboczy Ics : 18kA
(380/415V AC); 25kA (220/230V AC)

Length [mm]: 100

Width [mm]: 82

Height [mm]: 133

Connection type: Terminal block

Control type: mechaniczne

Rated breaking voltage Ue [V]: 380/415; 220/230

Rated insulation voltage UI [V]: 800

Rated impulse withstand voltage Uimp [V]: 8000

Number of poles: 3+N

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 16

Number of units in the secondary packaging : 1

Number of units in the packaging: 16

Net unit weight [g]: 1134

Grammage [g]: 1215

Gross unit weight [g]: 1184

Length of a unit pack [cm]: 14

Width of a unit pack [cm]: 11

Height of a unit pack [cm]: 9

Weight of a cardboard box [kg]: 19.44

Width of a cardboard box [cm]: 31

Height of a cardboard box [cm]: 20.5


Length of a cardboard box [cm]: 46

Volume of a cardboard box [m³]: 0.029233

38516 KMCCB-RT-125A-4P

MCCB molded case circuit breaker

125A, 160A: 6Nm
250A: 12Nm
400A: 20Nm

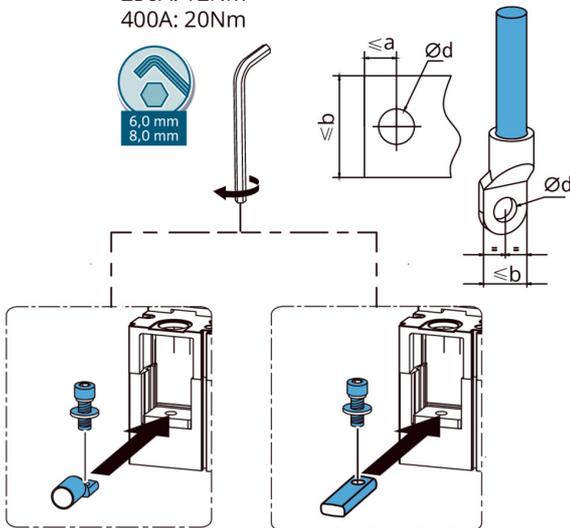

Unit:mm

No.	Frame size	Terminal block Width b	Terminal block Inner hole d	Terminal block Hole margin a
1	125	16	Ø 9	7
2	160	17	Ø 9	7
3	250	22	Ø 9	9
4	400	30	Ø 11	12.4



3P:
125A: 6x M8x16mm
160A, 250A: 6x M8x20mm
400A: 6x M10x30mm

4P:
125A: 8x M8x16mm
160A, 250A: 8x M8x20mm
400A: 8x M10x30mm