38739 KRD10-4/40/100-AC

Residual-current circuit breaker, 4P
5905339387394




PRODUCT PARAMETERS	
Rated voltage [V]	400 AC
Rated frequency [Hz]	50
Rated current [A]	40
Differential-rated current [mA]	100
Residual-current protection type	AC
IP class	20
Norm	PN-EN 61008-1
Terminal capacity – solid conductor [mm²]	max 25
Terminal capacity – stranded conductor [mm²]	max 16
Number of modules	4
Rated activation capacity[A]	10000
Rated insulation voltage UI [V]	400
Number of poles	4

DIMENSIONS AND MOUNTING	
Height [mm]	82

Date of issue: 06.05.2026, 14:56
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.
Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

DIMENSIONS AND MOUNTING	
Width [mm]	72
Length [mm]	75
Place of assembly	na szynę TH35
Range of sections of wires used [mm²]	max 25

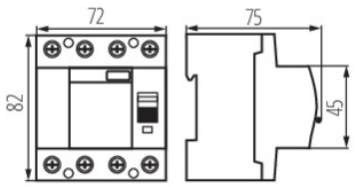

MATERIAL AND CONSTRUCTION	
Colour	white
Ambient temperature range to which the product can be exposed	-25÷40

LOGISTICS	
Unit of measurement	unit
Packaging method	30
Number of units in the secondary packaging	1
Number of units in the packaging	30
Net unit weight [g]	330
Grammage [g]	373
Gross unit weight [g]	358
Length of a unit pack [cm]	7.5
Width of a unit pack [cm]	8.5
Height of a unit pack [cm]	8
Weight of a cardboard box [kg]	11.19
Width of a cardboard box [cm]	27
Height of a cardboard box [cm]	19
Length of a cardboard box [cm]	47
Volume of a cardboard box [m³]	0.024111

We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.
Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN