

39170 BLINGO UHRA 95 60NW

Flush-mounted LED panel without power supply included

5905339391704



low
UGR



PRODUCT PARAMETERS:

Power-supply current [mA]: 600/850/1100

Driver [index]: 37272 (600mA); 37269 (850mA); 37270 (1100mA)

Maximum power [W]: max 40

Power factor: 0.92

Luminous flux of the light fitting [lm]: 2280 (600mA); 3040 (850mA); 3800 (1100mA)

Luminous efficiency [lm/W]: 95

Lighting angle [°]: 90

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour temperature: white

Colour rendering index: 97

Service life [h]: 50000

Number of on/off cycles: ≥50000

Diode type: LED SMD

Colour: white

Place of assembly: Recessed mount in the ceiling (coffered ceiling)

Place of application: Indoors

Compatible with a dimmer: no

Feeder included: no

Length [mm]: 595

Width [mm]: 595

Height [mm]: 28

Class of protection against electric shock: III

Lampshade material: plastic

Enclosure material: steel

Panel/frame material: steel

Ambient temperature range to which the product can be exposed: 5÷25

Shade type: microprismatic

Connection type: przewód zakończony wtyczką - DC

Power-supply type: direct current

IP class: 20

Kształt: square


UGR: <19

LED light source replaceability: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Control gear replaceability: The control panel or control equipment can be replaced by the end user

39170 BLINGO UHRA 95 60NW

Flush-mounted LED panel without power supply included

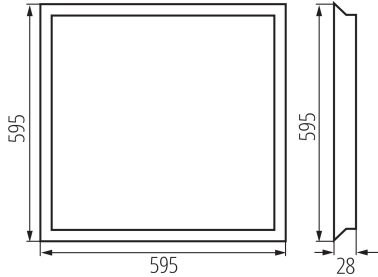

Product category according to 2019/2020/EU: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source

(kWh/1000h): 40

Energy efficiency class of the light source in the contains product (CP): E

Number of modules (LED light source): 6

Useful luminous flux of the light source Φ_{use} [lm]: 770

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Lighting technology used: LED

Non-directional or directional light source: NDLS

Mains or non-mains light source: NMLS

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging: 1

Number of units in the packaging: 5

Net unit weight [g]: 1454

Grammage [g]: 1882

Gross unit weight [g]: 1738

Length of a unit pack [cm]: 60

Width of a unit pack [cm]: 60

Height of a unit pack [cm]: 3

Weight of a cardboard box [kg]: 9.41

Width of a cardboard box [cm]: 16.5

Height of a cardboard box [cm]: 61.5

Length of a cardboard box [cm]: 61.5


Volume of a cardboard box [m³]: 0.062407

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation

39170 BLINGO UHRA 95 60NW

Flush-mounted LED panel without power supply included

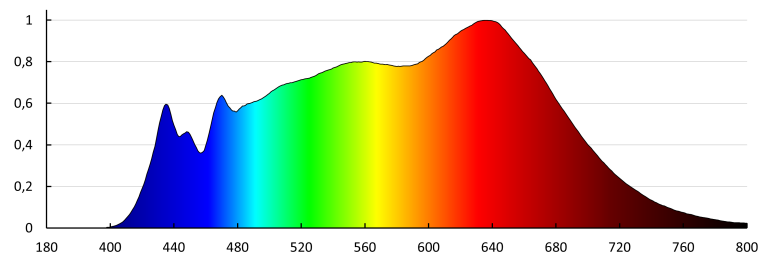

ACCESSORIES

37272

BLINGO DRV 24W ON-OFF

Zasilacz LED dedykowany pod panel BLINGO U E125LM 30NW(37271), BLINGO UHRA 95 120NW (39171) BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)



37269




BLINGO DRV 32W ON-OFF

Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW(37266), BLINGO U E125LM 60NW(37265), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)



39170 BLINGO UHRA 95 60NW

Flush-mounted LED panel without power supply included

37270		BLINGO DRV 40W ON-OFF	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW(37266), BLINGO U E125LM 60NW(37265), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)
37268		BLINGO DRV40W1-10V BK	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW (37266), BLINGO U E125LM 60NW (37265), BLINGO U E125LM 30NW (37271), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)
37267		BLINGO DRV42W DALI BK	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW (37266), BLINGO U E125LM 60NW (37265), BLINGO U E125LM 30NW (37271), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)