

39171 BLINGO UHRA 95 120NW

Flush-mounted LED panel without power supply included

5905339391711



PRODUCT PARAMETERS:

Power-supply current [mA]: 600/850/1100
Driver [index]: 37272 (600mA); 37269 (850mA); 37270 (1100mA)
Maximum power [W]: max 40
Power factor: 0.92
Luminous flux of the light fitting [lm]: 2280 (600mA); 3040 (850mA); 3800 (1100mA)
Luminous efficiency [lm/W]: 95
Lighting angle [°]: 90
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses : 6
Colour temperature: white
Colour rendering index: 97
Service life [h]: 50000
Number of on/off cycles: ≥50000
Diode type: LED SMD
Colour: white
Place of assembly: Recessed mount in the ceiling (coffered ceiling)
Place of application: Indoors
Compatible with a dimmer: no
Feeder included: no
Length [mm]: 1195
Width [mm]: 295
Height [mm]: 30
Class of protection against electric shock: III
Lampshade material: plastic
Enclosure material: steel
Panel/frame material: steel
Ambient temperature range to which the product can be exposed: 5÷25
Shade type: microprismatic
Connection type: przewód zakończony wtyczką - DC
Power-supply type: direct current
IP class: 20
Kształt: square
UGR: <19
LED light source replaceability: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)
Control gear replaceability: The control panel or control equipment can be replaced by the end user

39171 BLINGO UHRA 95 120NW

Flush-mounted LED panel without power supply included



Product category according to 2019/2020/EU: Containing product (CP)

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 40

Energy efficiency class of the light source in the contains product (CP): E

Number of modules (LED light source): 3

Useful luminous flux of the light source Φ_{use} [lm] : 1540

Useful luminous flux of the light source Φ_{use} [lm] : in sphere (360°)

Lighting technology used: LED

Non-directional or directional light source : NDLS

Mains or non-mains light source : NMLS

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 5

Number of units in the secondary packaging : 1

Number of units in the packaging : 5

Net unit weight [g] : 1460

Grammage [g] : 1942

Gross unit weight [g] : 1766

Length of a unit pack [cm] : 120

Width of a unit pack [cm] : 33

Height of a unit pack [cm] : 3.5

Weight of a cardboard box [kg] : 9.71

Width of a cardboard box [cm] : 19.5

Height of a cardboard box [cm] : 32

Length of a cardboard box [cm] : 122


Volume of a cardboard box [m³] : 0.076128

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website
- LED panel without power supply included
- The correct LED power supply available in the KANLUX range is required for proper operation

39171 BLINGO UHRA 95 120NW

Flush-mounted LED panel without power supply included

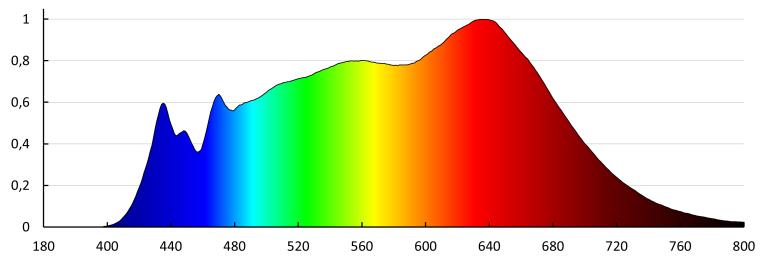

ACCESSORIES

37272	BLINGO DRV 24W ON-OFF	Zasilacz LED dedykowany pod panel BLINGO U E125LM 30NW(37271), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)
37269	BLINGO DRV 32W ON-OFF	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW(37266), BLINGO U E125LM 60NW(37265), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)

39171 BLINGO UHRA 95 120NW

Flush-mounted LED panel without power supply included

37270	BLINGO DRV 40W ON-OFF	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW(37266), BLINGO U E125LM 60NW(37265), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)
37268	BLINGO DRV40W1-10V BK	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW (37266), BLINGO U E125LM 60NW (37265), BLINGO U E125LM 30NW (37271), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)
37267	BLINGO DRV42W DALI BK	Zasilacz LED dedykowany do paneli BLINGO U E125LM 120NW (37266), BLINGO U E125LM 60NW (37265), BLINGO U E125LM 30NW (37271), BLINGO UHRA 95 120NW (39171), BLINGO UHRA 95 60NW (39170), BLINGO UIP 125LM 60NW (39239)