

Kanlux



EAN: 5905339392398

Flush-mounted LED panel without power supply included
Kanlux 39239 BLINGO UIP 125LM 60NW



low
UGR

IP
54



PRODUCT PARAMETERS

Power-supply current [mA]

600/850/1100

Date of issue: 10.07.2026, 15:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


EN

PRODUCT PARAMETERS

Driver [index]	37262 (600mA); 37263 (850mA); 37264 (1050mA); 37268 (600-1050mA); 37267 (450-1100mA)
Maximum power [W]	max 40
Luminous flux of the light fitting [lm]	3000 (600mA) / 4000 (850mA) / 5000 (1100mA)
Correlated colour temperature [K]	4000
Colour consistency in McAdam ellipses	6
Colour temperature	white
Luminous efficiency [lm/W]	max 125
Lighting angle [°]	90
Diode type	LED SMD
Integrated LED light source	yes
Colour rendering index	90
Service life [h]	50000
Luminous-flux-retention factor at the end of rated service life	L70B50
Number of on/off cycles	≥50000
Place of application	Indoors
IP class	54/20
Feeder included	no
Power-supply type	direct current
UGR	<19
LED light source replaceability	Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)
Control gear replaceability	The control panel or control equipment can be replaced by the end user
Product category according to 2019/2020/EU	Containing product (CP)
Mercury content in the lamp [mg]	0

DIMENSIONS AND MOUNTING

Height [mm]	26
Width [mm]	595
Length [mm]	595
Place of assembly	Recessed mount in the ceiling
Connection type	przewód zakończony wtyczką - DC



MATERIAL AND CONSTRUCTION

Colour	white
Enclosure material	steel
Lampshade material	plastic
Panel/frame material	steel
Shade type	microprismatic
Class of protection against electric shock	III
Kształt	square
Minimum distance from the illuminated object	0,5m

LIGHT SOURCE PARAMETERS

LED module	SL-M-500x10mm-3B4C-2406-33
On-mode power of the light source P_{on} [W]	6,3
Energy consumption in on-mode of the light source (kWh/1000h)	7
Energy efficiency class of the light source in the contains product (CP)	D
Number of modules (LED light source)	6

Date of issue: 10.07.2026, 15:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

MATERIAL AND CONSTRUCTION


Ambient temperature range to which the product can be exposed

5÷25

LOGISTICS


Unit of measurement	unit
Packaging method	5
Number of units in the secondary packaging	1
Number of units in the packaging	5
Net unit weight [g]	1606
Grammage [g]	2048
Gross unit weight [g]	1902
Length of a unit pack [cm]	60
Width of a unit pack [cm]	60
Height of a unit pack [cm]	3
Weight of a cardboard box [kg]	10.24
Width of a cardboard box [cm]	16.5
Height of a cardboard box [cm]	61.5
Length of a cardboard box [cm]	61.5
Volume of a cardboard box [m ³]	0.062407

PHOTOMETRIC DATA

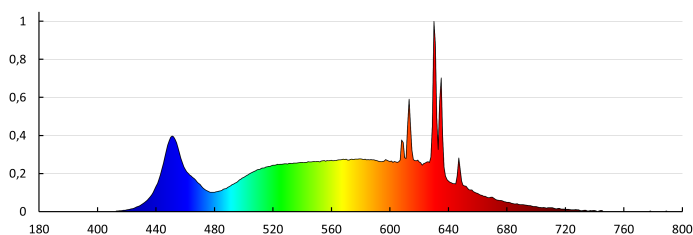

KANLUX S.A. (kat 39239) BLINGO UIP 125LM 60NW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 39239) BLINGO UIP 125LM 60NW
Lampy: 1 x BLINGO UIP 125LM 40W

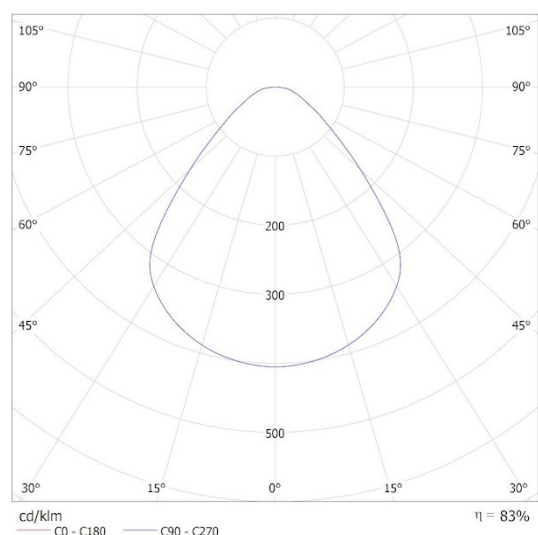

LIGHT SOURCE PARAMETERS

Useful luminous flux of the light source Φ_{use} [lm]	1010
Useful luminous flux of the light source Φ_{use} [lm]	in sphere (360°)
Standby power (Psb)	0
Height of the light source [mm]	500
Width of the light source [mm]	10
Depth of the light source [mm]	2
Chromaticity coordinates (x)	0,38
Chromaticity coordinates (y)	0,38
Claim of equivalent power [W]	72
R9 colour rendering index value	72
Survival factor	0,9
The lumen maintenance factor	0,96
Colour-tuneable light source	no
High luminance light source	no
Anti-glare shield	no
Dimmable	no

ADDITIONAL INFORMATION

5 years Warranty under the terms of the warranty statement, available on our website

LED panel without power supply included

The correct LED power supply available in the KANLUX range is required for proper operation

Date of issue: 10.07.2026, 15:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com