

39295 PRO-S S 40W-ZH NW

LED fixture

5905339392954



Kanlux PRO-S is a series of modern street luminaires designed with efficiency, durability and ease of installation in mind. Luminous efficacy reaches 160 lm/W, and durability up to 100,000 hours. Durable aluminum alloy housing and IK09 tempered glass guarantee reliability in difficult conditions, and a high IP66 protection level ensures full resistance to dust and moisture. The luminaires allow for adjustment of the tilt angle, installation on Ø50–Ø62 mm poles and quick, tool-free access to the power supply chamber. Integrated SPD 10kV surge protection and programmable power supplies (also with the DALI option) ensure full functionality and safety. The luminaires are available in two sizes: S and M, which allows you to match the solution to specific installation needs. The PRO-S ZH version allows integration with ZHAGA control systems (optionally NEMA). Kanlux PRO-S luminaires are covered by a 5-year manufacturer's warranty.

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 40

Luminous flux [lm]: 6300

Luminous efficiency of the lamp [lm/W]: 158

Lighting angle [°]: X150/Y125

Correlated colour temperature [K]: 4000

Colour consistency in McAdam ellipses: 6

Colour temperature: white

Colour rendering index: 70

Service life [h]: 100000

Luminous-flux-retention factor at the end of rated service life: L80B10

Number of on/off cycles: ≥30000

Diode type: LED SMD

Colour: grey

Place of assembly: street pole

Place of application: outdoors

Compatible with a dimmer: no


RAL: 9023

Control: Zhaga

Length [mm]: 535

39295 PRO-S S 40W-ZH NW

LED fixture

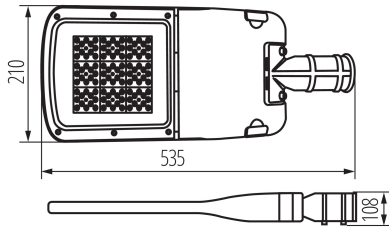

Width [mm]: 210

Height [mm]: 108

Class of protection against electric shock : II

Enclosure material: aluminum alloy

Protective glass material: Tempered glass

Ambient temperature range to which the product can be exposed: -20÷45

Connection type: Free cable ends

Wire type: H05RN-F

Wire length [m]: 0.4

Wire diameter [mm²]: 0,75-2,5

Overvoltage protection: 10kV

IK class: 08

IP class: 66

Additional information: Possibility of replacing the LED light source only by qualified personnel (only by the manufacturer service)

Additional information: Possibility of replacing the control equipment only by qualified personnel (only by the manufacturer service)

Mercury content: no

Mercury content in the lamp [mg]: 0

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy efficiency class of the light source in the contains product (CP): C

Chromaticity coordinates (x): 0,38

Chromaticity coordinates (y): 0,38

Survival factor: 0,9

The lumen maintenance factor: 0,96

Lighting technology used: LED

Non-directional or directional light source : NDLS

Mains or non-mains light source : NMLS

Connected light source (CLS): no

Colour-tuneable light source: no

High luminance light source: no

Anti-glare shield: no

Dimmable: no

LED fixture

PARAMETERS FOR LED AND OLED

MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 1

Number of units in the secondary packaging: 1

Number of units in the packaging: 1

Net unit weight [g]: 2988

Grammage [g]: 3530

Gross unit weight [g]: 3538

Length of a unit pack [cm]: 58

Width of a unit pack [cm]: 28

Height of a unit pack [cm]: 15.5

Weight of a cardboard box [kg]: 3.53

Width of a cardboard box [cm]: 28


Height of a cardboard box [cm]: 15.5

Length of a cardboard box [cm]: 58

Volume of a cardboard box [m³]: 0.025172

ADDITIONAL INFORMATION:

- 5 years Warranty under the terms of the warranty statement, available on our website

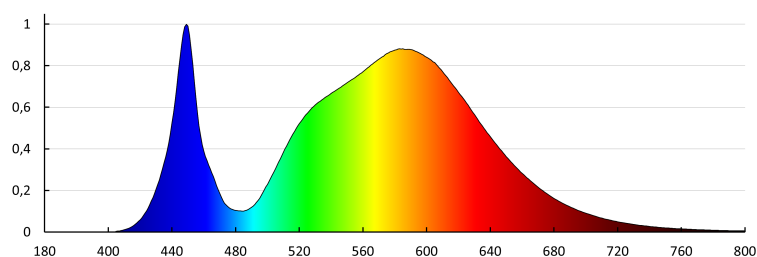


39295 PRO-S S 40W-ZH NW

LED fixture

KANLUX S.A. (kat 39295) PRO-S S 40W-ZH NW / Krzywa rozsytu światła
(biegunowo)

Oprawa: KANLUX S.A. (kat 39295) PRO-S S 40W-ZH NW
Lampy: 1 x PRO-S S 40W-ZH NW

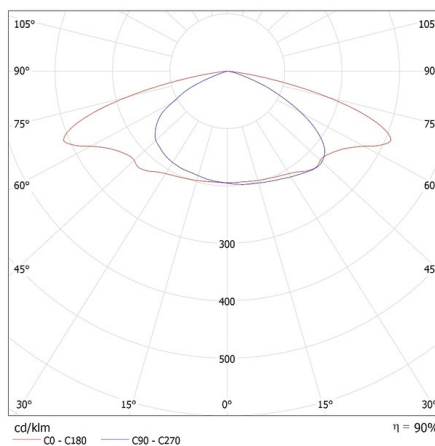

Date of issue: 11.06.2025, 10:51

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com