


39346 KMB10-B25/4

Miniature circuit breaker, 4P

5905339393463

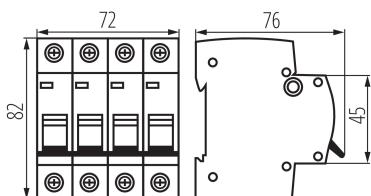

PRODUCT PARAMETERS:

Rated voltage [V]: 400 AC
Rated frequency [Hz]: 50
Rated current [A]: 25
Place of assembly: na szynę TH35
IP class: 20
Norm: PN-EN 60898-1
Length [mm]: 76
Width [mm]: 70
Height [mm]: 82
Ambient temperature range to which the product can be exposed: -5÷40
Range of sections of wires used [mm²]: 1÷25
Terminal capacity – solid conductor [mm²]: max 25
Terminal capacity – stranded conductor [mm²]: max 16
Release characteristics: B
Energy-limit class: 3
Number of modules: 4
Rated short-circuit current [A]: 10000
Rated insulation voltage UI [V]: 500
Number of poles: 4
Mechanical endurance: 10000
Electrical endurance: 4000

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 3
Number of units in the secondary packaging: 3
Number of units in the packaging: 30
Net unit weight [g]: 424
Grammage [g]: 459.33
Gross unit weight [g]: 450
Weight of a cardboard box [kg]: 13.7799
Width of a cardboard box [cm]: 25
Height of a cardboard box [cm]: 19
Length of a cardboard box [cm]: 46
Volume of a cardboard box [m³]: 0.02185