


39377 KMB10-C16/4

Miniature circuit breaker, 4P

5905339393777

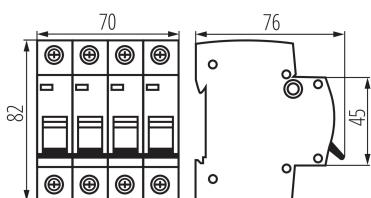

PRODUCT PARAMETERS:

Rated voltage [V]: 400 AC

Rated frequency [Hz]: 50

Rated current [A]: 16

Place of assembly: na szynę TH35

IP class: 20

Norm: PN-EN 60898-1

Length [mm]: 76

Width [mm]: 70

Height [mm]: 82

Ambient temperature range to which the product can be exposed: -5÷40

Range of sections of wires used [mm²]: 1÷25

Terminal capacity – solid conductor [mm²]: max 25

Terminal capacity – stranded conductor [mm²]: max 16

Release characteristics: C

Energy-limit class: 3

Number of modules: 4

Rated short-circuit current [A]: 10000

Rated insulation voltage UI [V]: 500

Number of poles: 4

Mechanical endurance: 10000

Electrical endurance: 4000

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 3

Number of units in the secondary packaging: 3

Number of units in the packaging: 30

Net unit weight [g]: 424

Grammage [g]: 459.33

Gross unit weight [g]: 424

Length of a unit pack [cm]: 7.2

Width of a unit pack [cm]: 7.2

Height of a unit pack [cm]: 8.5

Weight of a cardboard box [kg]: 13.7799

Width of a cardboard box [cm]: 25

Height of a cardboard box [cm]: 19

39377 KMB10-C16/4

Miniature circuit breaker, 4P

Length of a cardboard box [cm] : 46

Volume of a cardboard box [m³] : 0.02185

Date of issue: 15.12.2025, 16:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN