

Kanlux



EAN: 5905339900593

LED tape
KANLUX 46316 LEDS-B7,2W/M12IP65RGB

RGB



12V



Date of issue: 16.07.2026, 09:03

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com


EN

PRODUCT PARAMETERS

Rated voltage [V]	12 DC
Rated power [W]	1m = max 7,2
Luminous flux [lm]	1m = max 145
Correlated colour temperature [K]	RGB
Colour temperature	RGB
Diode type	LED SMD
Rated lamp-service life [h]	15000
Number of on/off cycles	≥15000
Place of application	Indoors
IP class	65
Possibility of cutting LED strips into segments [cm]	10
Mercury content	no
Mercury content in the lamp [mg]	0

DIMENSIONS AND MOUNTING

Width [mm]	10
Length [mm]	5000
Connection type	Free cable ends

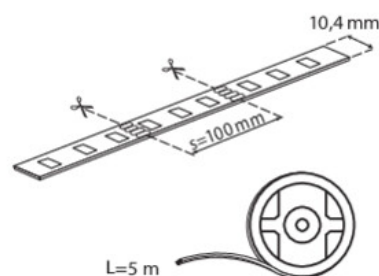

MATERIAL AND CONSTRUCTION

Class of protection against electric shock	III
Minimum distance from the illuminated object	0,1m
Ambient temperature range to which the product can be exposed	5÷25

LIGHT SOURCE PARAMETERS

On-mode power of the light source Pon [W]	0,5m = max 3,6
Dimmable	only with specific dimmers
Ilość diod na metr	30

LOGISTICS

Unit of measurement	unit
Packaging method	25
Number of units in the secondary packaging	25
Number of units in the packaging	50
Net unit weight [g]	94
Grammage [g]	154
Gross unit weight [g]	134
Length of a unit pack [cm]	21
Width of a unit pack [cm]	1
Height of a unit pack [cm]	22.5
Weight of a cardboard box [kg]	7.7
Width of a cardboard box [cm]	30.5
Height of a cardboard box [cm]	28
Length of a cardboard box [cm]	46
Volume of a cardboard box [m ³]	0.039284

Date of issue: 16.07.2026, 09:03

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com