


70523 MILO 7040T/P

Bulkhead fixture

5905339705235



Kanlux MILO is a classic channel luminaire used usually in technical rooms, garages, basements, staircases, corridors, etc. The luminaire has a metal (7040T) or plastic (7040T/P) protective mesh which protects the shade from mechanical damage.

PRODUCT PARAMETERS:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: max 25

Cap (Light source): E27

Light source: GLS/CFL/LED

Colour: grey

Place of assembly: wall mounted, ceiling mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Replaceable light source: yes

Light source included: no

Length [mm]: 165

Width [mm]: 100

Height [mm]: 110

Class of protection against electric shock: II

Lampshade material: glass

Enclosure material: plastic

Connection type: Terminal block

Range of sections of wires used [mm²]: 1-1,5

IK class: 06

IP class: 44

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 12

Number of units in the secondary packaging: 1

Number of units in the packaging: 12

Net unit weight [g]: 410

Grammage [g]: 441.67

Gross unit weight [g]: 458

Length of a unit pack [cm]: 18

Width of a unit pack [cm]: 13

Height of a unit pack [cm]: 12

70523 MILO 7040T/P

Bulkhead fixture



Weight of a cardboard box [kg]: 5.30004

Width of a cardboard box [cm]: 18

Height of a cardboard box [cm]: 35


Length of a cardboard box [cm] : 48

Volume of a cardboard box [m³]: 0.03024

KANLUX S.A. (kat 70523) MILO 7040T P / Krzywa rozszeru światła (biegunowo)

Oprawa: KANLUX S.A. (kat 70523) MILO 7040T P

Lampy: 1 x A60 80W/c

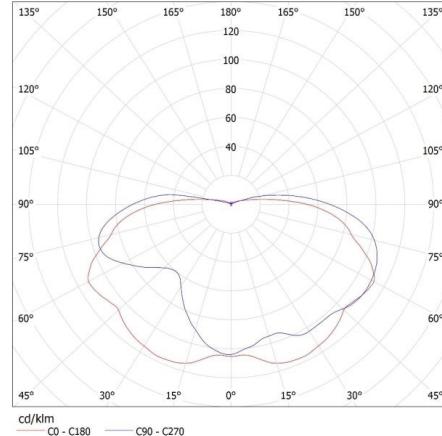

Date of issue: 04.08.2025, 14:26

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com