


70915 CYKLON EOL120

Ducted fan

8594056490066



CYKLON EOL120

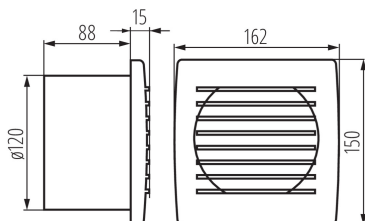

Kanlux CYKLON EOL series of fans is available in three sizes with diameter of 100, 120 and 150mm. They are made of plastic, in white colour. Their power is 19, 20 and 22W respectively. The number of rotations from each size comes to 2550/min.

PRODUCT PARAMETERS:

Colour: white
Place of assembly: Recessed mount in the wall
Place of application: Indoors
Off switch: yes
Length [mm]: 162
Width [mm]: 103
Height [mm]: 150
Assembly hole [mm]: Ø120
Cable length [m]: 1.9
Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Maximum power [W]: 20
Class of protection against electric shock: II
Engine rotation: 2550
Bearing type: sliding
Connection type: Cable terminated with a plug
Wire length [m]: 1.9
Sound pressure [dB]: 38
Air-flow volume rate [m³/h]: 150
Motor-power consumption [W]: 20
IP class: X4
Protection class: II

LOGISTIC DATA:

Packaging method: 12
Number of units in the packaging: 12
Net unit weight [g]: 600
Grammage [g]: 733.33
Length of a unit pack [cm]: 16
Width of a unit pack [cm]: 10.5
Height of a unit pack [cm]: 17
Weight of a cardboard box [kg]: 8.79996
Width of a cardboard box [cm]: 32
Height of a cardboard box [cm]: 33.5
Length of a cardboard box [cm]: 35
Volume of a cardboard box [m³]: 0.03752



Date of issue: 03.01.2023, 15:38

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

70915 CYKLON EOL120

Ducted fan

ADDITIONAL INFORMATION:

- Rotation speed: 2550/min
- Efficiency 150m³/h
- Noise level 38dB (A)
- CYKLON EOL120HT, additionally equipped with a moisture sensor which allows the fan to activate after reaching a pre-set moisture threshold