


08103 HAXA-DSO POWER LED-B

LED mirror light fitting

5905339081032

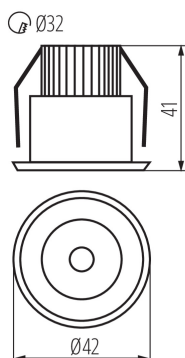

The wall and ceiling spot-beam holder Kanlux HAXA LED is a small eye to be used as additional lighting.

TYPE OF LIGHT SOURCE:

Lighting technology used: LED
Non-directional or directional light source: DLS
Mains or non-mains light source: NMLS
Connected light source (CLS): no
Colour-tuneable light source: no
High luminance light source: no
Anti-glare shield: no
Dimmable: no

PRODUCT PARAMETERS:

Colour: aluminium
Place of assembly: do wbudowania w ścianę|do wbudowania w sufit
Place of application: Indoors
Minimum distance from the illuminated object: 0,1m
Compatible with a dimmer: no
The product is not suitable to be covered with a heat-insulating material: yes
Width [mm]: 42
Height [mm]: 41
Depth [mm]: 42
Diameter [mm]: 42
Assembly hole [mm]: Ø32
Integrated LED light source: yes
Power-supply current [mA]: 350
Lamp rated current [mA]: 350
Maximum power [W]: 1.2
Class of protection against electric shock: III
Lampshade material: plastic
Diode type: POWER LED
Colour temperature: Warm white
Service life [h]: 40000
Number of on/off cycles: ≥20000
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: aluminum alloy
Connection type: Free cable ends
Wire length [m]: 0.1
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
IP class: 20

08103 HAXA-DSO POWER LED-B

LED mirror light fitting



PARAMETERS FOR DIRECTIONAL LIGHT SOURCES:

Peak luminous intensity [cd]: 700

Beam angle [°]: 20

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Energy consumption in on-mode of the light source (kWh/1000h): 2

Energy efficiency class: F

Useful luminous flux of the light source Φ_{use} [lm]: 110

Useful luminous flux of the light source Φ_{use} [lm]: in narrow cone (90°)

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

On-mode power of the light source P_{on} [W]: 1.2

Colour rendering index: 80

Chromaticity coordinates (x): 0.44

Chromaticity coordinates (y): 0.403

R9 colour rendering index value: 9

Survival factor: ≥ 0.9

The lumen maintenance factor: 0.96

PARAMETERS FOR LED AND OLED MAINS LIGHT SOURCES:

LED light source replaces a fluorescent light source without integrated ballast of a particular wattage: Not applicable

LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1

Number of units in the packaging: 50

Net unit weight [g]: 37

Grammage [g]: 56

Length of a unit pack [cm]: 5.5

Width of a unit pack [cm]: 5.5

Height of a unit pack [cm]: 6

Weight of a cardboard box [kg]: 2.8

Width of a cardboard box [cm]: 13

Height of a cardboard box [cm]: 32

Length of a cardboard box [cm]: 28


Volume of a cardboard box [m³]: 0.011648

ADDITIONAL INFORMATION:

- an electronic 350-mA DC power supply unit is required for proper functioning, e.g. ADI 350 or RICO available from Kanlux

08103 HAXA-DSO POWER LED-B

LED mirror light fitting

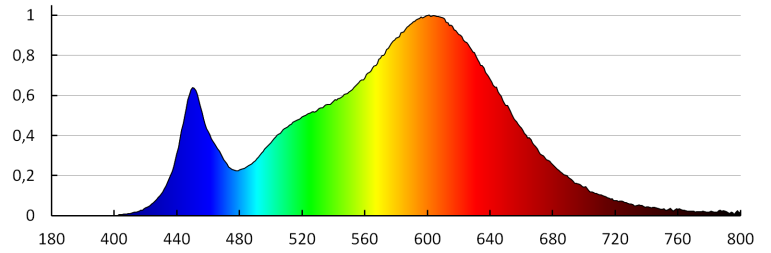

KANLUX S.A. (kat 8101) HAXA-DSL POWER LED + ADI 350 / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 8101) HAXA-DSL POWER LED + ADI 350
Lampy: 1 x HAXA + ADI 350

