


08120 OYO 2LED-CW

LED mirror lights

5905339081209

IP
68

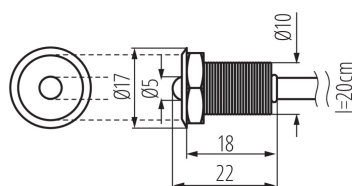

Kanlux OYO LED are spot-beam light accents to be used as decorative lighting. The small light points will help us to implement brave lighting projects also in saunas and bathrooms thanks to high tightness - IP68.

PRODUCT PARAMETERS:

Colour: aluminium

Place of assembly: do wbudowania w sufit|do wbudowania w podłogę|do wbudowania w ścianę

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,1m

Compatible with a dimmer: yes

Height [mm]: 22

Diameter [mm]: 17

Assembly hole [mm]: Ø10

Integrated LED light source: yes

Rated voltage [V]: 12 DC

Maximum power [W]: 0,22

Class of protection against electric shock: III

Diode type: LED DIP

Luminous flux [lm]: 5

Colour temperature: cold white

Service life [h]: 30000

Lighting angle [°]: 15

Enclosure material: Metal, plastic

Connection type: Free cable ends

Wire length [m]: 0.2

Lamp-heating time [s]: ≤1

Lamp-ignition time [s]: ≤0,5

IP class: 68

PARAMETERS FOR LED AND OLED LIGHT SOURCES:

Correlated colour temperature [K]: 6500

LOGISTIC DATA:

Unit of measurement: package

Packaging method: 50

Number of units in the secondary packaging: 50

Number of units in the packaging: 300

Net unit weight [g]: 12

Grammage [g]: 28.33

Length of a unit pack [cm]: 7.5

Width of a unit pack [cm]: 2

Height of a unit pack [cm]: 12

Weight of a cardboard box [kg]: 8.499

08120 OYO 2LED-CW

LED mirror lights



Width of a cardboard box [cm]: 25
Height of a cardboard box [cm]: 47
Length of a cardboard box [cm] : 47
Volume of a cardboard box [m³]: 0.055225

ADDITIONAL INFORMATION:

- OYO 2LED-CW, 2 pcs included
- OYO 5LED-CW, 5 pcs included

KANLUX S.A. (kat 08120) OYO 2LED-CW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 08120) OYO 2LED-CW
Lamps: 1 x OYO 2LED-CW

