


08820 ROLF JQ-L

MW motion sensor

5905339088208




Kanlux ROLF JQ is a motion detector. The horizontal angle of the detector work comes to 360 degrees. You can set adjustments of the lighting time and light intensity level at which the detector works.

PRODUCT PARAMETERS:**Colour:** white**Place of assembly:** wall mounted, ceiling mounted, surface mounted**Place of application:** Indoors**Micro-interval between relay contacts:** yes**Length [mm]:** 92**Width [mm]:** 42**Height [mm]:** 42**Sensitivity regulation:** yes**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Class of protection against electric shock:** II**Material:** plastic**Ambient temperature range to which the product can be exposed:** 5÷25**Sensor type:** microwave**Connection type:** Terminal block**Range of sections of wires used [mm²]:** 1÷2,5**Sensor-operation time [second-minute]:** 5-12**Sensor-operation frequency [MHz]:** 5,8**sensor working angle [°]:** H360/V160**Maximum operating time [min]:** 12**Minimum operating time[s]:** 5**Maximum power [VA]:** 1200**Illumination-level setpoint by which the sensor detects movement [lx]:** 2-2000**IP class:** 20**Sensor range[m]:** max 8**LOGISTIC DATA:****Packaging method:** 100**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 100**Net unit weight [g]:** 60**Grammage [g]:** 92**Length of a unit pack [cm]:** 10**Width of a unit pack [cm]:** 5**Height of a unit pack [cm]:** 5**Weight of a cardboard box [kg]:** 9.2

08820 ROLF JQ-L

MW motion sensor

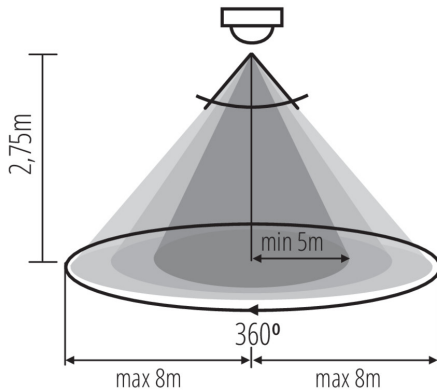**Width of a cardboard box [cm]:** 27**Height of a cardboard box [cm]:** 30.4**Length of a cardboard box [cm] :** 42**Volume of a cardboard box [m³]:** 0.034474**ADDITIONAL INFORMATION:**

- Maximum movement detection up to 8m
- Maximum horizontal angle of operation of the motion sensor - 360°
- Maximum vertical angle of operation of the motion sensor - 160°
- Light on time adjustable from 5s to 12min
- Capability to set the light intensity of the environment in which the device works
- Sensitivity adjustment in the range of 2...2000lx
- Motion detection 0.3...3m/s (1...10km/h)