


08822 ROLF MINI JQ-L

MW motion sensor

5905339088222



ROLF MINI JQ-L



Kanlux ROLF JQ is a motion detector. The horizontal angle of the detector work comes to 360 degrees. You can set adjustments of the lighting time and light intensity level at which the detector works.

PRODUCT PARAMETERS:

Colour: white

Place of assembly: wall mounted, ceiling mounted, surface mounted

Place of application: Indoors

Micro-interval between relay contacts: yes

Length [mm]: 70

Width [mm]: 40

Height [mm]: 40

Sensitivity regulation: yes

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Ambient temperature range to which the product can be exposed: 5÷25

Sensor type: microwave

Connection type: Terminal block

Range of sections of wires used [mm²]: 1÷2,5

Sensor-operation time [second-minute]: 8-12

Sensor-operation frequency [MHz]: 5,8

sensor working angle [°]: H360/V140

Maximum operating time [min]: 12

Minimum operating time[s]: 8

Maximum power [VA]: 800

Illumination-level setpoint by which the sensor detects movement [lx]: 2-2000

IP class: 20

Sensor range[m]: max 10

LOGISTIC DATA:

Unit of measurement: unit

Packaging method: 100


Number of units in the secondary packaging: 1

Number of units in the packaging: 100

Net unit weight [g]: 50

Grammage [g]: 78

Gross unit weight [g]: 70

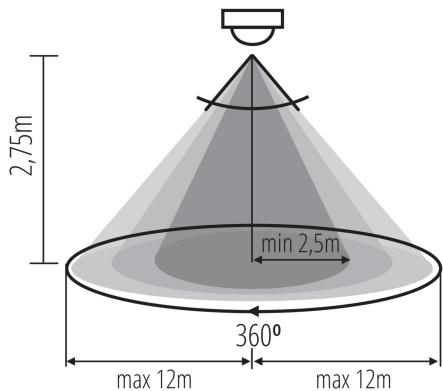08822 ROLF MINI JQ-L**MW motion sensor****Length of a unit pack [cm]: 6****Width of a unit pack [cm]: 4.5****Height of a unit pack [cm]: 10****Weight of a cardboard box [kg]: 7.8****Width of a cardboard box [cm]: 31****Height of a cardboard box [cm]: 22****Length of a cardboard box [cm] : 52****Volume of a cardboard box [m³]: 0.035464****ADDITIONAL INFORMATION:**

- Maximum movement detection up to 10m
- Maximum horizontal angle of operation of the motion sensor – 360°
- Maximum vertical angle of operation of the motion sensor – 140°
- Light on time adjustable from 10s to 30min
- Capability to set the light intensity of the environment in which the device works
- Sensitivity adjustment in the range of 2...2000lx
- Motion detection 0.3...3m/s (1...10km/h)