

90121

KDB-IP65-S06T MK2


KDB-series distribution board

5905339901217



| PRODUCT PARAMETERS   |                      |
|----------------------|----------------------|
| Rated voltage [V]    | 690 AC; 1500 DC      |
| Place of application | Indoors and outdoors |
| IP class             | 65                   |
| IK class             | 08                   |
| Norm                 | PN-EN 62208          |

| DIMENSIONS AND MOUNTING |              |
|-------------------------|--------------|
| Place of assembly       | wall mounted |

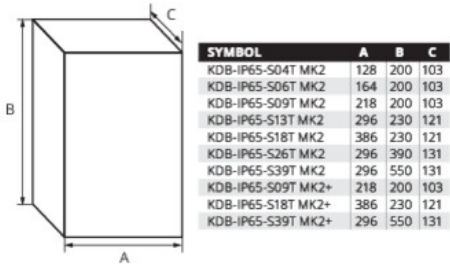

## MATERIAL AND CONSTRUCTION

|                                                               |        |
|---------------------------------------------------------------|--------|
| Colour                                                        | white  |
| Class of protection against electric shock                    | II     |
| Ambient temperature range to which the product can be exposed | -25+40 |

## LOGISTICS

|                                             |       |
|---------------------------------------------|-------|
| Unit of measurement                         | unit  |
| Packaging method                            | 30    |
| Number of units in the packaging            | 30    |
| Width of a cardboard box [cm]               | 20    |
| Height of a cardboard box [cm]              | 307.5 |
| Length of a cardboard box [cm]              | 20    |
| Volume of a cardboard box [m <sup>3</sup> ] | 0.123 |

Date of issue: 30.07.2026, 09:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com