


90122 KDB-IP65-S09T MK2

KDB-series distribution board
5905339901224



PRODUCT PARAMETERS	
Rated voltage [V]	690 AC; 1500 DC
Place of application	Indoors and outdoors
IP class	65
IK class	08
Norm	PN-EN 62208
Number of modules	9P
number of rows	1

DIMENSIONS AND MOUNTING	
Height [mm]	200
Width [mm]	103
Length [mm]	218
Place of assembly	wall mounted

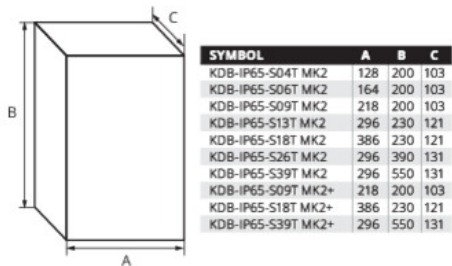

MATERIAL AND CONSTRUCTION

Colour	white
Class of protection against electric shock	II
Ambient temperature range to which the product can be exposed	-25+40

LOGISTICS

Unit of measurement	unit
Packaging method	20
Number of units in the secondary packaging	1
Number of units in the packaging	20
Net unit weight [g]	754
Gross weight [g]	922
Gross unit weight [g]	858
Length of a unit pack [cm]	20.5
Width of a unit pack [cm]	11
Height of a unit pack [cm]	23
Weight of a cardboard box [kg]	18.44
Width of a cardboard box [cm]	42.5
Height of a cardboard box [cm]	47.5
Length of a cardboard box [cm]	55.5
Volume of a cardboard box [m ³]	0.112041

Date of issue: 30.07.2026, 09:16

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com