

90123 KDB-IP65-S13T MK2


KDB-series distribution board

5905339901231



PRODUCT PARAMETERS	
Rated voltage [V]	690 AC; 1500 DC
Place of application	Indoors and outdoors
IP class	65
IK class	08
Norm	PN-EN 62208
Number of modules	13P
number of rows	1

DIMENSIONS AND MOUNTING	
Height [mm]	230
Width [mm]	121
Length [mm]	296
Place of assembly	wall mounted

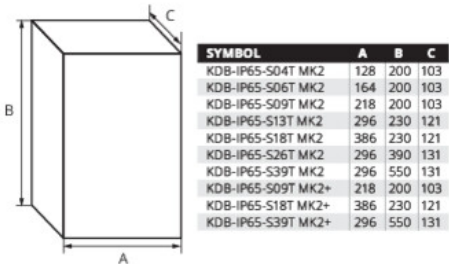

MATERIAL AND CONSTRUCTION

Colour	white
Class of protection against electric shock	II
Ambient temperature range to which the product can be exposed	-25+40

LOGISTICS

Unit of measurement	unit
Packaging method	16
Number of units in the secondary packaging	1
Number of units in the packaging	16
Net unit weight [g]	1234
Grammage [g]	1481.25
Gross unit weight [g]	1380
Length of a unit pack [cm]	23.5
Width of a unit pack [cm]	13.5
Height of a unit pack [cm]	30.5
Weight of a cardboard box [kg]	23.7
Width of a cardboard box [cm]	53
Height of a cardboard box [cm]	50
Length of a cardboard box [cm]	62.5
Volume of a cardboard box [m ³]	0.165625

Date of issue: 30.07.2026, 09:17

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com