

90129 KDB-IP65-S18T MK2+


KDB-series distribution board

5905339901293



PRODUCT PARAMETERS	
Rated voltage [V]	690 AC; 1500 DC
Place of application	Indoors and outdoors
IP class	65
IK class	08
Norm	PN-EN 62208
Number of modules	18P
number of rows	1

DIMENSIONS AND MOUNTING	
Height [mm]	230
Width [mm]	121
Length [mm]	386
Place of assembly	wall mounted

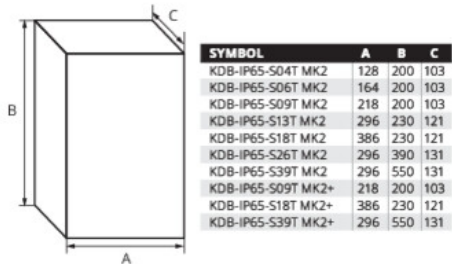

MATERIAL AND CONSTRUCTION

Colour	white
Class of protection against electric shock	II
Ambient temperature range to which the product can be exposed	-25+40

LOGISTICS

Unit of measurement	unit
Packaging method	10
Number of units in the secondary packaging	1
Number of units in the packaging	10
Net unit weight [g]	1716
Grammage [g]	2050
Gross unit weight [g]	1918
Length of a unit pack [cm]	23.5
Width of a unit pack [cm]	13.5
Height of a unit pack [cm]	39
Weight of a cardboard box [kg]	20.5
Width of a cardboard box [cm]	41
Height of a cardboard box [cm]	49
Length of a cardboard box [cm]	67.5
Volume of a cardboard box [m ³]	0.135608

Date of issue: 30.07.2026, 09:18

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com