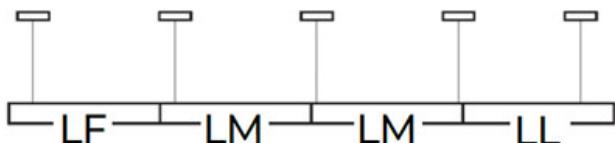




29469 ALD 33W-840-MPR-W-NT

Linear LED luminaire

5905339294692


**DALI**
system**PRODUCT PARAMETERS:****Colour:** white**Place of assembly:** ceiling mounted**Place of application:** Indoors**Minimum distance from the illuminated object:** 0,5m**Compatible with a dimmer:** DALI**Replaceable light source:** no**Fixture lighting direction:** down**Length [mm]:** 1133**Integrated LED light source:** yes**Version for connection in line [initial element]:** 32235 (NT), 32043 (Z)**Version for connection in line [central element]:** 32259 (NT), 32067 (Z)**Version for connection in line [final element]:** 32283 (NT), 32091 (Z)**Explanation of markings and signs used:** (NT) - ceiling mounted, (Z) - for suspension on the ceiling**Rated voltage [V]:** 220-240 AC**Rated frequency [Hz]:** 50**Maximum power [W]:** 33**Class of protection against electric shock:** I**Lampshade material:** plastic**Diode type:** LED SMD**Luminous flux [lm]:** 2830**Colour temperature:** white**Service life [h]:** 50000**Luminous-flux-retention factor at the end of rated service life:** L80B10**Number of on/off cycles:** ≥30000**Lighting angle [°]:** X75/Y90**Ambient temperature range to which the product can be exposed:** 5÷25**Shade type:** microprismatic**Enclosure material:** aluminum alloy**Connection type:** Self-clamping block**Range of sections of wires used [mm²]:** 0,5÷2,5**The fixture set includes built-in LED's with the following energy classes:** A++, A+, A**Lamp-heating time [s]:** ≤1**Lamp-ignition time [s]:** ≤0,5**IP class:** 20**GENERAL PRODUCT PARAMETERS:****Correlated colour temperature [K]:** 4000

29469 ALD 33W-840-MPR-W-NT

Linear LED luminaire

Height [mm]: 65**Width [mm]:** 58**Colour rendering index:** 80**PARAMETERS FOR LED AND OLED
MAINS LIGHT SOURCES:****Colour consistency in McAdam ellipses:** ≤6**LOGISTIC DATA:****Unit of measurement:** unit**Packaging method:** 1**Number of units in the secondary packaging:** 1**Number of units in the packaging:** 1**Net unit weight [g]:** 2014**Grammage [g]:** 2350**Length of a unit pack [cm]:** 136**Width of a unit pack [cm]:** 11**Height of a unit pack [cm]:** 7**Weight of a cardboard box [kg]:** 2.35**Width of a cardboard box [cm]:** 11**Height of a cardboard box [cm]:** 7**Length of a cardboard box [cm]:** 136**Volume of a cardboard box [m³]:** 0.010472**ADDITIONAL INFORMATION:**

- 5 years Warranty under the terms of the warranty statement, available on our website

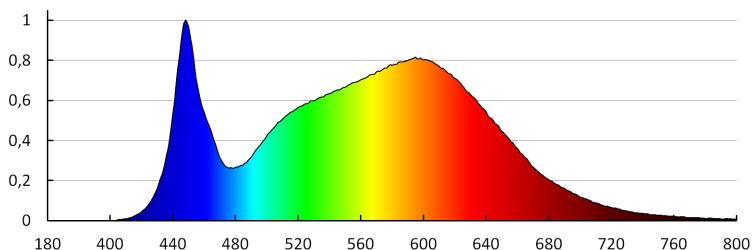**ACCESSORIES:****32543 ALIN CORD DALI 1F-W**

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, white, 150 cm

**32544 ALIN CORD DALI 1F-B**

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, black, 150 cm

29469 ALD 33W-840-MPR-W-NT

Linear LED luminaire

**32545** ALIN CORD DALI 1F-SR

Power supply terminal for ALIN luminaires and tracks, 1-phase, DALI, silver, 150 cm

**07871** ROPE-NT 150 SINGLE

ROPE-NT 150 SINGLE steel rope (single) for suspending fittings, 2 pcs. in a set

**29557** ALIN NT GRIP

Wall bracket for the ALIN luminaire, 2 pcs included

**25979** KLOSZ MPR AL 23W/33W

MPR shade for fitting ALIN, MPR SHADE AL 23W/33W,(25979)

