



Garden light fitting with replaceable light source

5905339257208



IP
68



Waterproof Kanlux AKVEN LED luminaire is a perfect solution for lighting ponds. It is equipped with a replaceable LED light source and adapted to long-term immersion in water, even 3 metres deep.

GENERAL DATA:

Colour: green
Place of assembly: surface mounted
Place of application: Indoors and outdoors
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Replaceable light source: yes
Length [mm]: 82
Diameter [mm]: 72
Number of chokes: 1
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 12 AC; 12 DC
Rated frequency [Hz]: 50
Maximum power [W]: max 35
Class of protection against electric shock: III
Light source: MR16
Light source included: yes
Luminous flux [lm]: 300
Colour temperature: Warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Cap: Gx5,3
Service life [h]: 25000
Number of on/off cycles: ≥15000
Lighting angle [°]: 120
Ambient temperature range to which the product can be exposed: -20÷35
Enclosure material: aluminum alloy
Connection type: Bolt terminal block
Range of sections of wires used [mm²]: 1-1,5
Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
The fixture is movable vertically [°]: 180
IP class: 68

Garden light fitting with replaceable light source

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10

Net unit weight [g]: 370

Grammage [g]: 424

Length of a unit pack [cm]: 8

Width of a unit pack [cm]: 8

Height of a unit pack [cm]: 9.5


Weight of a cardboard box [kg]: 4.24

Width of a cardboard box [cm]: 18.5

Height of a cardboard box [cm]: 11

Length of a cardboard box [cm]: 42

Volume of a cardboard box [m³]: 0.008547

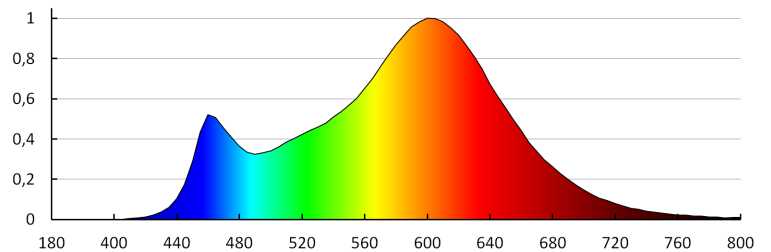

KANLUX S.A. (kat 25720) AKVEN LED / LDC (Polar)

Luminaire: KANLUX S.A. (kat 25720) AKVEN LED
Lamps: 1 x TOMI LED5W MR16-WW

