

## **25781** IVIAN LED 4,5W SN-WW


LED spotlight fitting, IP44

5905339257819

















Kanlux IVIAN LED is a family of downlight type holders. It is characterized by an increased degree of tightness - IP44, which allows using it in bathrooms and rooms with increased humidity. LED SMD diodes are the light source and the casing is made of plastic.

#### **GENERAL DATA:**

Colour: nickel satin

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-

insulating material: yes

Height [mm]: 55 Diameter [mm]: 83

Assembly hole [mm]: Ø65

**Integrated LED light source**: yes

### TECHNICAL DATA:

Rated voltage [V]: 220-240 AC Rated frequency [Hz]: 50 Maximum power [W]: 4,5

Class of protection against electric shock: ||

Lampshade material: plastic

Diode type: LED SMD Luminous flux [lm]: 410

Colour temperature: Warm white

Correlated colour temperature [K]: 3000 **Colour consistency in McAdam ellipses**: ≤6

Colour rendering index: 80 **Service life [h]**: 15000

Number of on/off cycles: ≥25000

Lighting angle [°]: 100

Luminous efficiency of the lamp [lm/W]: 91


Ambient temperature range to which the product can be

exposed: 5÷25

Enclosure material: plastic **Connection type**: Terminal block Lamp-heating time [s]:  $\leq 1$ 

Lamp-ignition time [s]:  $\leq 0.5$ 

IP class: 44







# **25781** IVIAN LED 4,5W SN-WW

### LED spotlight fitting, IP44



### LOGISTIC DATA:

Packaging method: 50

Number of units in the secondary packaging: 1


Number of units in the packaging: 50

Net unit weight [g]: 78 Grammage [g]: 145.2

Length of a unit pack [cm]: 11.5 Width of a unit pack [cm]: 9.5 Height of a unit pack [cm]: 7.5

Weight of a cardboard box [kg]: 7.26 Width of a cardboard box [cm]: 24 Height of a cardboard box [cm]: 40.5 Length of a cardboard box [cm]: 49

Volume of a cardboard box [m<sup>3</sup>]: 0.047628

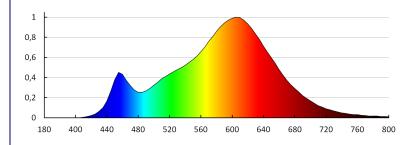

KANLUX S.A. (kat 25781) IVIAN LED 4,5W SN-WW / Krzywa rozsyłu światła (biegunowo)

Oprawa: KANLUX S.A. (kat 25781) IVIAN LED 4,5W SN-WW Lampy: 1 x IVIAN LED 4\_5W SN-WW

