

29599 AREL LED DL 25W-WW

Downlight fitting

5905339295996

IP
65/20

ultra
SLIM
panel

HIGH
quality



Kanlux AREL LED is a new family of downlights which do not have frame. High tightness class IP65/20 and exceptional, simple, and at the same time surprising design make Kanlux AREL LED fit into each interior. Thanks to the unique structure, the panel is only 9 mm thick - it is the thinnest panel available on the market.

GENERAL DATA:

Colour: white

Place of assembly: Recessed mount in the ceiling

Place of application: Indoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

The product is not suitable to be covered with a heat-insulating material: yes

Length [mm]: 215

Width [mm]: 215

Height [mm]: 23

Assembly hole [mm]: 194x194

Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Maximum power [W]: 25

Class of protection against electric shock: II

Lampshade material: PMMA

Diode type: LED SMD

Luminous flux [lm]: 2260

Useful luminous flux of the light source Φ_{use} [lm]: 3000

Useful luminous flux of the light source Φ_{use} [lm]: in sphere (360°)

Colour temperature: Warm white

Correlated colour temperature [K]: 3000

Colour consistency in McAdam ellipses: ≤ 6

Colour rendering index: 80

Service life [h]: 15000

Number of on/off cycles: ≥ 30000

Lighting angle [°]: 120


Luminous efficiency of the lamp [lm/W]: 90

Ambient temperature range to which the product can be exposed: 5÷25


Enclosure material: aluminum alloy

Connection type: Terminal block

Range of sections of wires used [mm²]: 0,75-1,5

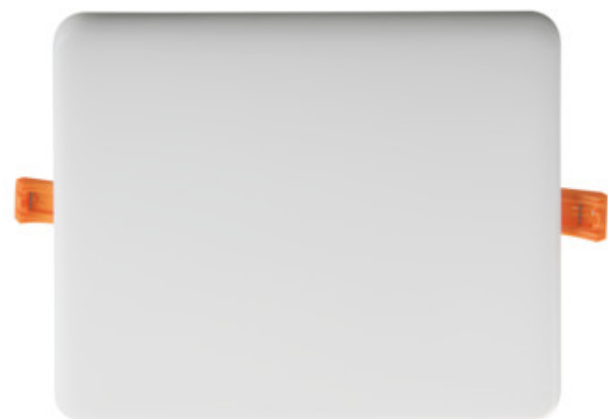


Downlight fitting

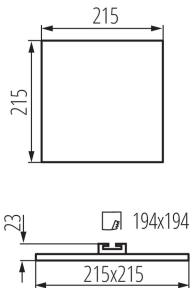

Lamp-heating time [s]: ≤ 1
Lamp-ignition time [s]: $\leq 0,5$
IP class: 65/20

LOGISTIC DATA:

Packaging method: 50
Number of units in the secondary packaging: 1
Number of units in the packaging: 50
Net unit weight [g]: 492
Grammage [g]: 626
Length of a unit pack [cm]: 24.5
Width of a unit pack [cm]: 3.5
Height of a unit pack [cm]: 26.5
Weight of a cardboard box [kg]: 31.3
Width of a cardboard box [cm]: 51
Height of a cardboard box [cm]: 29
Length of a cardboard box [cm]: 87
Volume of a cardboard box [m³]: 0.128673

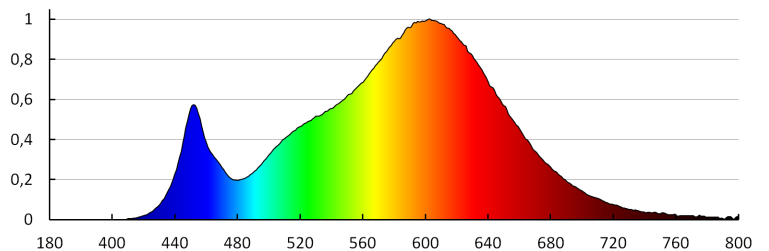

KANLUX S.A. (kat 29599) AREL LED DL 25W-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 29599) AREL LED DL 25W-WW
Lamps: 1 x AREL LED DL 25W-WW

