

Kanlux

**A NEW DIMENSION
IN HIGH BAY
LUMINAIRES**

**Kanlux
HB PRO
AIO**





Kanlux

Kanlux HB PRO AIO

160
lm/W

High luminous efficacy
- 160lm/W.



Quality backed
by a 5-year warranty.

IP
65

A modern design that
effectively reduces
luminaire temperature
and provides a

**high level of ingress
protection** IP65.

Kanlux

Kanlux HB PRO AIO

A new generation of High Bay luminaires featuring integrated power, correlated color temperature, and beam angle selection.



**SELECT
ABLE
POWER**

Selectable power
100W/150W/200W



CCT

Selectable color
temperature
4000K/5000K/6500K



Luminaire equipped
with a **ZHAGA** socket



**Hermetic
connector**

Adjustable
beam angle
60° / 90°



Kanlux


Kanlux HB PRO AIO

Four clips allow quick beam angle adjustment without the need for additional tools.


1.
Open the luminaire using the four clips.



2.
Rotate the diffuser to the desired beam angle.

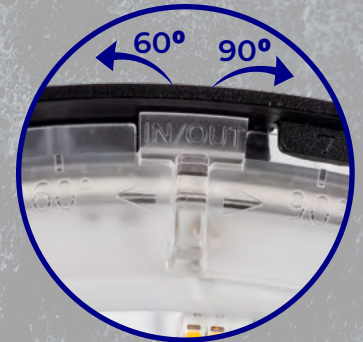

3.
Secure the luminaire by snapping the four clips into place.

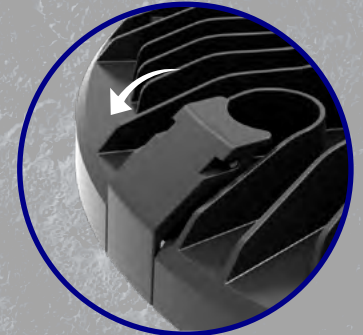



Kanlux

Kanlux HB PRO AIO
Applications:
**gyms, industrial facilities,
warehouses, production
and manufacturing halls,
factories.**

Kanlux

Kanlux HB PRO AIO



160
lm/W

IP
65

CCT



Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50

Correlated colour temperature [K]: 4000 / 5000 / 6500

Electric shock protection class: I

Housing material: aluminium alloy

Protective glass material: plastic

Durability [h]: 50000

Ambient temperature range [°C]: -20÷40

Beam angle: 60° / 90°


IK08



27168 HB PRO AIO M200W	100W	14500lm / 4000K
		16000lm / 5000K
		14500lm / 6500K
	150W	21750lm / 4000K
		24000lm / 5000K
		21750lm / 6500K
	200W	29000lm / 4000K
		32000lm / 5000K
		29000lm / 6500K

33199

HBPA BRACKET
Luminaire accessory

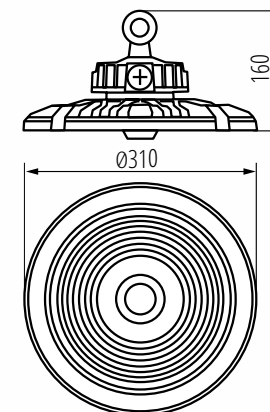

5-year warranty according to the warranty terms available on the website.